

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

2611-0149P

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

09/857494

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/JP00/06955

October 5, 2000

October 7, 1999

## TITLE OF INVENTION

METHOD OF AND DEVICE FOR CELL DISASSEMBLY, AND COMPUTER PRODUCT

## APPLICANT(S) FOR DO/EO/US

YAMADA, Hirotooshi; TANAKA, Kentaro

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39 (1).
4. ☐ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
- a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau). WO 01/26304
- b. ☒ has been transmitted by the International Bureau.
- c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
- a. ☒ is transmitted herewith.
- b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4)
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
- a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
- b. ☐ have been transmitted by the International Bureau.
- c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
- d. ☒ have not been made and will not be made.
8. ☒ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☒ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 20. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98-International Search Report (PCT/ISA/210) w/ documents
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
14. ☐ A SECOND or SUBSEQUENT preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821-1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☒ Other items or information:
- 1.) Twenty-nine (29) sheets of Formal Drawings

U.S. APPLICATION NO. (SEE 37 CFR 1.53) <div style="font-size: 2em; font-weight: bold; margin-left: 50px;">07-857494</div>	INTERNATIONAL APPLICATION NO. PCT/JP00/06955	ATTORNEY'S DOCKET NUMBER 2611-0149P																						
21. <input checked="" type="checkbox"/> The following fees are submitted: <b>BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5):</b> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO, and International Search Report not prepared by the EPO or JPO. .... <b>\$1,000.00</b>  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO. .... <b>\$860.00</b>  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO. .... <b>\$710.00</b>  International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4). .... <b>\$690.00</b>  International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4). .... <b>\$100.00</b> <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="text-align: left;">CALCULATIONS</th> <th style="text-align: left;">PTO USE ONLY</th> </tr> <tr> <td style="text-align: right;"><b>\$ 860.00</b></td> <td></td> </tr> <tr> <td style="text-align: right;"><b>\$ 0</b></td> <td></td> </tr> </table>	CALCULATIONS	PTO USE ONLY	<b>\$ 860.00</b>		<b>\$ 0</b>																	
CALCULATIONS	PTO USE ONLY																							
<b>\$ 860.00</b>																								
<b>\$ 0</b>																								
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="text-align: right;"><b>\$</b></td> <td style="text-align: right;"><b>0</b></td> </tr> </table>	<b>\$</b>	<b>0</b>																				
<b>\$</b>	<b>0</b>																							
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:20%;">CLAIMS</th> <th style="width:20%;">NUMBER FILED</th> <th style="width:20%;">NUMBER EXTRA</th> <th style="width:40%;">RATE</th> </tr> <tr> <td>Total Claims</td> <td style="text-align: center;">19 - 20 =</td> <td style="text-align: center;">0</td> <td style="text-align: right;">X <b>\$18.00</b></td> </tr> <tr> <td>Independent Claims</td> <td style="text-align: center;">3 - 3 =</td> <td style="text-align: center;">0</td> <td style="text-align: right;">X <b>\$80.00</b></td> </tr> <tr> <td colspan="3">MULTIPLE DEPENDENT CLAIM(S) (if applicable) None</td> <td style="text-align: right;">+ <b>\$270.00</b></td> </tr> </table>	CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	Total Claims	19 - 20 =	0	X <b>\$18.00</b>	Independent Claims	3 - 3 =	0	X <b>\$80.00</b>	MULTIPLE DEPENDENT CLAIM(S) (if applicable) None			+ <b>\$270.00</b>	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="text-align: right;"><b>\$</b></td> <td style="text-align: right;"><b>0</b></td> </tr> <tr> <td style="text-align: right;"><b>\$</b></td> <td style="text-align: right;"><b>0</b></td> </tr> <tr> <td style="text-align: right;"><b>\$</b></td> <td style="text-align: right;"><b>0</b></td> </tr> </table>		<b>\$</b>	<b>0</b>	<b>\$</b>	<b>0</b>	<b>\$</b>	<b>0</b>
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE																					
Total Claims	19 - 20 =	0	X <b>\$18.00</b>																					
Independent Claims	3 - 3 =	0	X <b>\$80.00</b>																					
MULTIPLE DEPENDENT CLAIM(S) (if applicable) None			+ <b>\$270.00</b>																					
<b>\$</b>	<b>0</b>																							
<b>\$</b>	<b>0</b>																							
<b>\$</b>	<b>0</b>																							
<b>TOTAL OF ABOVE CALCULATIONS =</b>		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="text-align: right;"><b>\$</b></td> <td style="text-align: right;"><b>860.00</b></td> </tr> </table>	<b>\$</b>	<b>860.00</b>																				
<b>\$</b>	<b>860.00</b>																							
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="text-align: right;"><b>\$</b></td> <td style="text-align: right;"><b>0</b></td> </tr> </table>	<b>\$</b>	<b>0</b>																				
<b>\$</b>	<b>0</b>																							
<b>SUBTOTAL =</b>		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="text-align: right;"><b>\$</b></td> <td style="text-align: right;"><b>860.00</b></td> </tr> </table>	<b>\$</b>	<b>860.00</b>																				
<b>\$</b>	<b>860.00</b>																							
Processing fee of <b>\$130.00</b> for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="text-align: right;"><b>\$</b></td> <td style="text-align: right;"><b>0</b></td> </tr> </table>	<b>\$</b>	<b>0</b>																				
<b>\$</b>	<b>0</b>																							
<b>TOTAL NATIONAL FEE =</b>		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="text-align: right;"><b>\$</b></td> <td style="text-align: right;"><b>860.00</b></td> </tr> </table>	<b>\$</b>	<b>860.00</b>																				
<b>\$</b>	<b>860.00</b>																							
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). <b>\$40.00</b> per property +		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="text-align: right;"><b>\$</b></td> <td style="text-align: right;"><b>40.00</b></td> </tr> </table>	<b>\$</b>	<b>40.00</b>																				
<b>\$</b>	<b>40.00</b>																							
<b>TOTAL FEES ENCLOSED =</b>		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="text-align: right;"><b>\$</b></td> <td style="text-align: right;"><b>900.00</b></td> </tr> </table>	<b>\$</b>	<b>900.00</b>																				
<b>\$</b>	<b>900.00</b>																							
a. <input checked="" type="checkbox"/> A check in the amount of <b>\$ 900.00</b> to cover the above fees is enclosed.  b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.  c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>02-2448</u> .		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="text-align: right;">Amount to be:</td> <td style="text-align: right;">\$</td> </tr> <tr> <td style="text-align: right;">refunded</td> <td></td> </tr> <tr> <td style="text-align: right;">charged</td> <td style="text-align: right;">\$</td> </tr> </table>	Amount to be:	\$	refunded		charged	\$																
Amount to be:	\$																							
refunded																								
charged	\$																							
<p><b>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</b></p> <p>Send all correspondence to:  <b>Birch, Stewart, Kolasch &amp; Birch, LLP</b> or Customer No. 2292  <b>P.O. Box 747</b>  <b>Falls Church, VA 22040-0747</b>  <b>(703)205-8000</b></p> <p><b>Date: June 6, 2001</b> _____</p> <p style="text-align: right;">By  _____          Michael K. Mutter, #29,680</p>																								

09/857494

JC18 Rec'd PCT/PTO 0 6 JUN 2001

PATENT  
2611-0149P

IN THE U.S. PATENT AND TRADEMARK OFFICE

Applicant: YAMADA, Hirotooshi et al. Conf.:  
Int'l. Appl. No.: PCT/JP00/06955  
Appl. No.: New Group:  
Filed: June 6, 2001 Examiner:  
For: METHOD OF AND DEVICE FOR CELL  
DISASSEMBLY, AND COMPUTER PRODUCT

PRELIMINARY AMENDMENT

**BOX PATENT APPLICATION**

Assistant Commissioner for Patents  
Washington, DC 20231

June 6, 2001

Sir:

The following Preliminary Amendments and Remarks are respectfully submitted in connection with the above-identified application.

AMENDMENTS

IN THE SPECIFICATION:

Please amend the specification as follows:

Before line 1, insert --This application is the national phase under 35 U.S.C. § 371 of PCT International Application No. PCT/JP00/06955 which has an International filing date of October 5, 2000, which designated the United States of America and was not published in English.

09/857494 060601

REMARKS

The specification has been amended to provide a cross-reference to the previously filed International Application.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. § 1.16 or under 37 C.F.R. § 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By

Michael K. Mutter, #29,680

MKM/cgc  
2611-0149P

P.O. Box 747  
Falls Church, VA 22040-0747  
(703) 205-8000

(Rev. 02/12/01)

## SPECIFICATION

## TITLE OF THE INVENTION

Method of and device for cell disassembly, and computer  
5 product

## TECHNICAL FIELD

The present invention relates to a cell disassembly  
device such as CLAD (cell assembly and disassembly device)  
10 which can transmit and receive effective data (effective  
time slot) on STM (synchronous transfer mode) circuit having  
plural time slots (TS) divided and multiplexed in time in  
frame period through ATM (asynchronous transfer mode)  
network, by using, for example, SDT (structured data  
15 transfer) method designated in Recommendation I.363.1  
B-ISDN ATM Adaptation Layer Specification: Type 1 AAL of  
ITU-T (Telecommunication Standardization Sector of  
International Telecommunication Union), a cell disassembly  
method, and a computer-readable recording medium recording  
20 a program for executing this method on a computer. More  
particularly, this invention relates to a cell disassembly  
device for absorbing fluctuations of cells by a buffer, a  
cell disassembly method, and a computer-readable recording  
medium recording a program for executing this method on a  
25 computer.

09857494-000601

## BACKGROUND ART

Recently, the ATM communication is noticed as a new communication method for the multimedia age. In the conventional STM communication method, during communication, the physical circuit of the STM network is always occupied in every media between terminals, but in the ATM communication system, the circuit between terminals is set as a logic virtual path, and the physical circuit is occupied dynamically only by the necessary portion depending on the necessity, so that an efficient multimedia communication is realized.

Fig. 26 shows a configuration of a system for transmitting and receiving data on the STM circuit through the ATM network by using a conventional cell assembly and disassembly device (cell disassembly device). Reference numerals 61a, 61b, and 61c denote conventional cell assembly and disassembly devices which can transmit and receive the effective data on the STM circuit by transforming into ATM cells (hereinafter called cells), reference numeral 63 denotes an ATM network for communication in asynchronous transfer mode, 62a, 62b, and 62c denote STM circuit interfaces, reference numerals 64a, 64b, and 64c denote ATM circuit interfaces, and reference numerals 65a and 65b denote virtual paths set on the ATM network 63.

In the STM/ATM communication system having such

configuration, effective data (continuous data) for the STM circuit interface 62b entered in the cell assembly and disassembly device 61a from the STM circuit interface 62a is sequentially assembled into a cell, which is a 53-byte fixed length packet, in the cell assembly and disassembly device 61a, and is provided with VPI (virtual path identifier) #1 in the header, and is transmitted to the ATM network 63 at a specific speed. Consequently, the cell transferred on the virtual path 65a according to VPI#1 is received in the cell assembly and disassembly device 61b, and is returned from the cell into the original continuous data herein, and is transmitted to the STM circuit interface 62b.

25        On the other hand, effective data (continuous data)

for the STM circuit interface 62c entered in the cell assembly and disassembly device 61a from the STM circuit interface 62a is sequentially assembled into a cell in the cell assembly and disassembly device 61a, and is provided with VPI#2 in the header, and is transmitted to the ATM network 63 at a specific speed. Consequently, the cell transferred on the virtual path 65b according to VPI#2 is received in the cell assembly and disassembly device 61c, and is returned from the cell into the original continuous data herein, and is transmitted to the STM circuit interface 62c.

Similarly, as a flow in reverse direction, effective data for the STM circuit interface 62a entered in the cell assembly and disassembly device 61c from the STM circuit interface 62c is sequentially assembled into a cell in the cell assembly and disassembly device 61c, and is provided with VPI#2 in the header, and is transmitted to the ATM network 63 at a specific speed. Consequently, the cell transferred on the virtual path 65b according to VPI#2 is received in the cell assembly and disassembly device 61a, and is returned into the original continuous data herein, and is transmitted to the STM circuit interface 62a.

The cell assembly and disassembly device 61 (cell assembly and disassembly device 61a, 61b, or 61c) has a structure as shown in a functional block diagram in Fig. 27. The cell assembly and disassembly device 61 comprises



the ATM circuit interface unit 71 for terminating the ATM circuit interface (physical layer processing), the cell assembly unit 73 for forming the continuous data received from STM circuit interface unit 72 into a cell, the cell  
 5   disassembly unit 74 for disassembling the cell received from the ATM circuit interface unit 71 to restore into continuous data, the STM circuit interface 72 for terminating the STM circuit interface, and the device management unit 75 for managing the entire devices of the cell assembly and  
 10   disassembly device 61. The ATM circuit interface 64 may be any one of the ATM circuit interfaces 64a, 64b, and 64c, and the STM circuit interface 62 may be any one of the STM circuit interfaces 62a, 62b, and 62c.

According to the ITU-T, in the ITU-T Recommendation  
 15   I.363.1, the structured data transfer method is designated as the cell transfer method of data on the STM circuit having a specific frame period through the ATM network 63. A cell format used in the conventional structured data transfer method is shown in Fig. 28. The cell assembly unit 73 divides  
 20   only the effective data extracted from arbitrary plural time slots, out of the STM circuit interface 62 composed of  $[64 \text{ kb/s}] \times n$  ( $n$ : natural number) time slots (TS), in the unit of 46 bytes (in the case of P format) or 47 bytes (in the case of non-P format), adds AAL1 (ATM adaptation layer type  
 25   1) header and ATM header (including VPI), assembles the cell

in the format shown in Fig. 28 by destination (virtual path 65), and transmits to the ATM circuit interface unit 71. The virtual path 65 is either virtual path 65a or virtual path 65b.

5           On the other hand, the cell disassembly unit 74 analyzes the VPI in the header of the cell received from the ATM circuit interface unit 71, judges the sender (virtual path 65), analyzes the sequence number in the AAL1 header, detects cell discarding and insertion of wrong cell, and processes  
10   countermeasures, absorbs delay fluctuations occurring during cell transfer in the ATM network 63 in every virtual path 65, distributes the data extracted from the payload into necessary time slots according to the sender, and transmits to the STM circuit interface unit 72. Further,  
15   the cell disassembly unit 74, when receiving a cell in P format, analyzes the pointer field, detects the boundary of frame period in the STM circuit, and determines assignment of which byte of the data extracted from the payload in which time slot.

20           The cell disassembly unit 74 has a structure as shown  
in a functional block diagram in Fig. 29. The cell  
disassembly unit 74 comprises following units. The AAL1  
processor 81 for extracting the VPI and data (including frame  
boundary information) from the received cell, and  
25   transmitting respectively to a write controller 83 and the



individual buffers VPB1 (VPI#1) to VPBm (VPI#m) in a cell buffer 92 according to the instruction (write signal) from the write controller 83. The cell buffer 92 for storing the write data and frame boundary information temporarily in each virtual path 65 (VPI). The multiplexer 93 for multiplexing the data and frame boundary information being read out from the individual buffer VPB1 to VPBm in the cell buffer 92 according to the instruction (read signal) from the read controller 85. VPTH1 to VPTHm are the reading-start thresholds set respectively in the buffer VPB1 to VPBm. Although VPTH1 to VPTHm are shown in Fig. 30, they will be utilized in the explanation of operation provided later. These thresholds are actually stored in the buffer monitor unit 84.

15           The device management unit 75 shown in Fig. 27 manages  
the entire structure of the cell assembly and disassembly  
device 61, and sets necessary parameters and collects status  
in the individual units of the cell disassembly unit 74,  
ATM circuit interface unit 71, cell assembly unit 73, and  
20   STM circuit interface unit 72. To realize this function,  
the device management unit 75 and individual units are  
connected through a control bus. For the sake of simplicity  
of the functional block diagram, the control bus is shown  
in Fig. 27 only, but for setting of parameters and collection  
25   of status, sub-blocks in individual units shown in Fig. 27,

for example, sub-blocks in the cell disassembly unit 74 are also connected with control bus.

Further, the databus width in the ATM circuit interface unit 64 and STM circuit interface unit 62 is serial (1 bit),  
 5 but in the cell assembly and disassembly device 61, generally, data is exchanged in the width of 8 bits. For example, when the ATM interface speed is 155.52 MHz, inside the cell assembly and disassembly device 61, as mentioned above, the interface is 8-bit wide, and most of the parts operate in  
 10 the clock of the ATM interface system, and therefore the internal basic clock is 19.44 MHz (= 155.52 MHz/8 bits).

The operation of the conventional cell assembly and disassembly device 61 will now be explained. The STM circuit interface 72 shown in Fig. 27 converts the bit row received  
 15 from the STM circuit interface 62 from serial to parallel (8 bits), extracts the frame boundary and time slot, and transmits all data, together with the timing information, to the cell assembly unit 73. The cell assembly unit 73 assembles only the effective data in a cell of a format shown  
 20 in Fig. 28 in every destination (virtual path 65) according to the instruction (to assign the data from which time slot into which virtual path 65) from a TS/VP conversion table not shown in the diagram, and transmits to the ATM circuit interface unit 71. The ATM circuit interface unit 71 inserts  
 25 the cell received from the cell assembly unit 73 into the

09057494.060601

payload of physical layer frame such as SDH (synchronous digital hierarchy) or SONET (synchronous optical network), converts from parallel to serial, and transmits to the ATM circuit interface 64.

5           Similarly, as a flow in reverse direction, the ATM circuit interface unit 71 converts the bit row received from the ATM circuit interface 64 from serial to parallel, processes the physical layer by detecting cell synchronism or the like, and transmits all effective extracted cells  
10 together with timing information to the cell disassembly unit 74.

          The AAL1 processor 81 in the cell disassembly unit 74 shown in Fig. 29 extracts the VPI from the header of the received cell, notices it to the write controller 83, and  
15 analyzes the sequence number in the AAL1 header, and detects cell discarding and insertion of wrong cell. When cell discarding is detected, in this case, the lost data is compensated (inserting all-1 pattern of 46 bytes if the discarded cell is supposed to be P format, or 47 bytes in  
20 the case of non-P format), and further when the discarded cell is supposed to be P format, the frame boundary information is also predicted and compensated. When a wrong cell insertion is detected, the wrong inserted cell is discarded. Later, the information extracted from the  
25 payload of the received cell and frame boundary information

09657494.060601

are transmitted to the fluctuation absorption buffer unit 82.

The write controller 83 analyzes the VPI received from the AAL1 processor 81, judges the sender (virtual path 65),  
 5 generates a corresponding write signal, and transmits to the fluctuation absorption buffer unit 82 and buffer monitor unit 84. In Fig. 30, the fluctuation absorption buffer unit 82 stores, according to the write signal received from the write controller 83, the data and frame boundary information  
 10 received from the AAL1 processor 81 temporarily in the individual buffers VPB1 to VPBm prepared in each virtual path 65 (VPI#1 to #m).

The buffer monitor unit 84 monitors the data accumulated amount held in the cell buffer 92 in every  
 15 individual buffers VPB1 to VPBm, from the write signal from the write controller 83 and read signal from the read controller 85, and controls the operation of the write controller 83 and read controller 85 according to the result. For example, the data accumulating amount in the individual  
 20 buffers VPB1 to VPBm which are empty upon start of communication gradually increases by turning on the write action instruction and turning off the read action instruction until reaching the reading-start thresholds VPTH1 to VPTHm by write action, and when the data accumulated  
 25 amount reaches the reading-start thresholds VPTH1 to VPTHm,

the read action instruction is also turned on sequentially.

The read controller 85, when the reading-start instruction from the buffer monitor unit 84 is ON, generates read signals to be distributed correctly into the time slots in which read data is distributed, and transmits to the fluctuation absorption buffer unit 82, according to the instruction (to assign the data from which virtual path 65 into which time slot time slot) from the VP/TS conversion table 86, frame boundary information from the fluctuation absorption buffer 82, and timing information from the STM circuit interface unit 72.

The VP/TS conversion table 86 stores the corresponding relation of the virtual path 65 (VPI) and time slot, that is, the information showing which virtual path 65 is set (which VPI is present), and which time slot is used by each virtual path 65, and notices the information to the read controller 85. The STM circuit interface unit 72 inserts the data being readout by the read controller 85 into the payload (time slot) of the physical layer frame, converts from parallel into serial, and transmits to the STM circuit interface 62.

Thus, in the conventional method, the received data and frame boundary information are once held in the cell buffer 92 in the fluctuation absorption buffer 82, and by stopping the reading action (delaying the reading-start



timing) until the data accumulated amount reaches the reading-start threshold after start of communication, delay fluctuations occurring during cell transfer in the ATM network 63 is absorbed, and the continuity of the data issued to the STM circuit interface 62 is assured.

Herein, the reading-start thresholds  $VPTH1$  to  $VPTHm$  of individual buffers  $VPB1$  to  $VPBm$  can be basically expressed with the following equation (1), supposing the maximum of the delay fluctuation determined as the characteristic of the ATM network 63 to be  $\pm D$  and the communication speed of the virtual path 65 accommodated to be  $V$  (identifier  $k = 1$  to  $m$ ).

$$V_{PTHk} = V_k \times D \quad \dots (1)$$

The capacity  $L_k$  (identifier  $k = 1$  to  $m$ ) required as  
15 individual buffers VPB1 to VPBm can be basically expressed  
with the following equation (2).

$$L_k = 2 \times V_{PTHk} = 2XV_k \times D \quad \dots (2)$$

However, since the received data is written into the cell buffer 82 in cell unit, if the calculation result in equation 1 is 47 bytes (worth 1 cell) or less, it is general to express as follows.

$$VPTH_k = 48 \text{ bytes (1 cell + 1 byte)} \quad \dots (3)$$

$$L_k = 94 \text{ bytes (2 cells)} \quad \dots (4)$$

As shown in equation (2), the capacity L (capacity  
25 L1 to Lm) of individual buffers VPB1 to VPBm used as

fluctuation absorption buffers basically depends on the communication speed of the virtual buffer accommodated. Accordingly, in the conventional cell assembly and disassembly device 61, the cell buffer 92 is realized mainly  
5 by the following two methods, that is, the individual memory method and common memory method.

In the individual memory method, one memory is divided into plural fixed banks, and the banks are used as individual buffers VPB1 to VPBm, or plural individual memories are  
10 prepared physically, and used as individual buffers VPB1 to VPBm.

In this method, since the individual buffers VPB1 to VPBm are composed of simple first-in first-out (FIFO) memories, the memory control circuit is simple. However,  
15 so as to be flexibly applicable to completely different communication speeds in individual virtual paths 65, capacities of all individual buffers VPB1 to VPBm must conform to the maximum communication speed of the STM circuit interface 62, for example, in the case of the ISDN (integrated  
20 services digital network) temporary group speed interface, the capacity must be large enough to accommodate the speed of 1.536 Mb/s, and this is the simplest configuration and the memory control circuit is the easiest, but the total memory capacity becomes extremely large.

25 Accordingly, it has been attempted to curtail the total

00057494 "060601

memory capacity by providing the applicable communication speed with limiting conditions and making use of the regularity of the communication speeds in the limiting conditions. For example, in the limiting conditions "to be applicable to maximum speed and communication speed to the power of 2 of 64 kb/s only," the memory capacity of individual buffers VPB1 to VPBm is composed of 1 for 1.536 Mb/s + 2 for 512 kb/s + 3 for 256 kb/s + 6 for 128 kb/s + 12 for 64 kb/s. In spite of such curtailing means, however, the cell buffer 92 cannot be realized at the minimum memory cost in this method. Features of this method are briefly summarized as follows.

Merit: Memory control circuit is simple.

On the other hand, in the common memory method, one memory is finely divided into cell levels (for example, in the units of 64 bytes each), and obtained memory blocks are commonly shared by all virtual paths 65, and in each virtual path 65 as required, plural memory blocks are occupied sequentially, and combined in chain, so that the individual buffers VPB1 to VPBm are realized.

This method is flexibly applicable to various communication speeds, and requires only a minimum limit of total memory capacity because the memory is shared, but the demerit is that the memory control circuit is very

complicated as disclosed, for example, in Japanese Laid-open Patent No. 8-331149. The total memory capacity (common memory capacity)  $L_s$  required in this method may be basically expressed with the following equation (5), supposing the maximum communication speed of the STM circuit interface 62 to be  $V_{max}$ .

$$L_s = 2 \times V_{max} \times D \quad \dots (5)$$

Features of this method are briefly summarized as follows.

10 Merit: Total memory capacity is small.

Demerit: Memory control circuit is extremely complicated.

According to the prior art, however, since fluctuations are absorbed by the buffer of which capacity depends on the virtual path which is variable in communication speed, if attempted to curtail the total capacity of the memory for absorbing fluctuations, the memory control circuit is complicated and the cost is increased, or if attempted to simplify the memory control circuit, the total capacity of the memory for absorbing fluctuations becomes large, and the cost is increased, too.

It is an object of this invention to provide a cell disassembly device capable of suppressing both increase of total capacity of cell for absorbing fluctuations and complication of memory control circuit. It is also an object





device, the cell disassembly unit accumulates data after start of communication by writing data distributed in each time slot into the buffer, reads out the data from the buffer, parallel to writing, when passing a first prescribed amount, and sends out the read data to the STM circuit interface. Therefore, fluctuations can be absorbed in a simple procedure.

The cell disassembly device according to still another aspect of this invention further comprises a setting unit which sets the prescribed amount or first prescribed time.

According to the above-mentioned cell disassembly device, the prescribed amount or first prescribed time can be set by the setting unit. Therefore, the prescribed amount or first prescribed time can be adjusted depending on the environments of use.

The cell disassembly device according to still another aspect of this invention further comprises a measuring unit which measures fluctuations of the cell, in which the setting unit sets the value of the prescribed amount or first prescribed time on the basis of the result of measurement by the measuring unit.

According to the above-mentioned cell disassembly device, the measuring unit measures fluctuations of the cell, and the setting unit sets the value of the prescribed amount or first prescribed time on the basis of the result of

measurement by the measuring unit. Therefore, the prescribed amount or first prescribed time can be adjusted automatically and appropriately.

In the cell disassembly device according to still  
5 another aspect of this invention, the prescribed amount or  
first prescribed time is present independently in each buffer,  
and the cell disassembly unit determines the reading-start  
timing from the buffer independently in each buffer.

According to the above-mentioned cell disassembly  
10 device, the prescribed amount or first prescribed time is  
present independently in each buffer, and the cell  
disassembly unit determines the reading-start timing from  
the buffer independently in each buffer, and therefore the  
reading-start timing can be controlled finely in each buffer.

15 In the cell disassembly device according to still  
another aspect of this invention, the prescribed amount or  
first prescribed time is present independently in each  
virtual path, and the cell disassembly unit determines the  
reading-start timing from the buffer independently in every  
20 one or two or more buffers corresponding to each virtual  
path.

According to the above-mentioned cell disassembly device, the prescribed amount or first prescribed time is present independently in each virtual path, and the cell  
25 disassembly unit determines the reading-start timing from





virtual path when the data accumulated amount reaches the prescribed amount or passing the prescribed first time from start of communication, in all buffers out of one or two or more buffers corresponding to a same virtual path.

5       According to the above-mentioned cell disassembly device, the cell disassembly unit starts reading action from all buffers corresponding to the virtual path when the data accumulated amount reaches the prescribed amount or passing the prescribed first time from start of communication, in  
10 all buffers out of one or two or more buffers corresponding to a same virtual path, and therefore, in a simple method, the reading-start timing in every one or two or more buffers corresponding to each virtual path can be controlled.

In the cell disassembly device according to still  
15 another aspect of this invention, the cell disassembly unit once stops, when an underflow occurs in the buffer, reading out from the buffer having the underflow, and resumes reading out when the data accumulated amount reaches again the prescribed amount or passing a second prescribed time after  
20 occurrence of underflow.

According to the above-mentioned cell disassembly device, the cell disassembly unit once stops, when an underflow occurs in the buffer, reading out from the buffer having the underflow, and resumes reading out when the data  
25 accumulated amount reaches again the prescribed amount or

passing a second prescribed time after occurrence of underflow, and therefore if an underflow occurs, a normal communication can be recovered promptly.

In the cell disassembly device according to still  
5 another aspect of this invention, the cell disassembly unit, when an underflow occurs in any one of one or two or more buffers corresponding to a same virtual path, resets all buffers corresponding to this virtual path, and once stops writing and reading in these buffers, and resumes writing  
10 so that the data belonging to a same frame period may be accumulated uniformly at the beginning of these buffers, and resumes reading out when the data accumulated amount in these buffers reaches again the prescribed amount or passing a second prescribed time after execution of  
15 resetting.

According to the above-mentioned cell disassembly device, the cell disassembly unit, when an underflow occurs in any one of one or two or more buffers corresponding to a same virtual path, resets all buffers corresponding to  
20 this virtual path, and once stops writing and reading in these buffers, and resumes writing so that the data belonging to a same frame period may be accumulated uniformly at the beginning of these buffers, and resumes reading out when the data accumulated amount in these buffers reaches again  
25 the prescribed amount or passing a second prescribed time

00057491-000601

after execution of resetting, and therefore if an underflow occurs, a normal communication can be recovered promptly.

In the cell disassembly device according to still another aspect of this invention, the cell disassembly unit  
5 resets, when an overflow occurs in the buffer, the buffer having the overflow, once stops reading out from this buffer, and resumes reading out when the data accumulated amount reaches again the prescribed amount or passing a second prescribed time after execution of resetting.

10 According to the above-mentioned cell disassembly device, the cell disassembly unit resets, when an overflow occurs in the buffer, the buffer having the overflow, once stops reading out from this buffer, and resumes reading out when the data accumulated amount reaches again the prescribed  
15 amount or passing a second prescribed time after execution of resetting, and therefore if an overflow occurs, a normal communication can be recovered promptly.

In the cell disassembly device according to still another aspect of this invention, the cell disassembly unit,  
20 when an overflow occurs in any one of one or two or more buffers corresponding to a same virtual path, resets all buffers corresponding to this virtual path, and once stops writing and reading in these buffers, and resumes writing so that the data belonging to a same frame period may be  
25 accumulated uniformly at the beginning of these buffers,

and resumes reading out when the data accumulated amount in these buffers reaches again the prescribed amount or passing a second prescribed time after execution of resetting.

5           According to the above-mentioned cell disassembly device, the cell disassembly unit, when an overflow occurs in any one of one or two or more buffers corresponding to a same virtual path, resets all buffers corresponding to this virtual path, and once stops writing and reading in 10 these buffers, and resumes writing so that the data belonging to a same frame period may be accumulated uniformly at the beginning of these buffers, and resumes reading out when the data accumulated amount in these buffers reaches again the prescribed amount or passing a second prescribed time 15 after execution of resetting, and therefore if an overflow occurs, a normal communication can be recovered promptly.

          In the cell disassembly device according to still another aspect of this invention, the cell disassembly unit once stops, when an overflow occurs in the buffer, writing 20 into the buffer having the overflow, and resumes writing when the data accumulated amount in this buffer decreases to the prescribed amount or passing a second prescribed time after occurrence of overflow.

          According to the above-mentioned cell disassembly 25 device, the cell disassembly unit once stops, when an

SECRET  
TOP SECRET

overflow occurs in the buffer, writing into the buffer having the overflow, and resumes writing when the data accumulated amount in this buffer decreases to the prescribed amount or passing a second prescribed time after occurrence of  
5 overflow, and therefore if an overflow occurs, a normal communication can be recovered promptly.

In the cell disassembly device according to still another aspect of this invention, the cell disassembly unit, when an overflow occurs in any one of one or two or more  
10 buffers corresponding to a same virtual path, once stops writing in all buffers corresponding to this virtual path, and resumes writing when the data accumulated amount in these buffers decreases again to the prescribed amount or passing a second prescribed time after occurrence of overflow.

15 According to the above-mentioned cell disassembly device, the cell disassembly unit once stops, when an overflow occurs in the buffer, writing into the buffer having the overflow, and resumes writing when the data accumulated amount in this buffer decreases to the prescribed amount  
20 or passing a second prescribed time after occurrence of overflow, and therefore if an overflow occurs, a normal communication can be recovered promptly, and therefore if an overflow occurs, a normal communication can be recovered promptly.

25 The cell disassembly device according to still



an STM circuit interface, comprising the step of storing the data distributed in each time slot temporarily in a buffer provided in each time slot, and absorbing fluctuations of the cell.

5           According to the above-mentioned cell disassembly method, the storing step stores the data distributed in each time slot temporarily in the buffer provided in each time slot, and absorbs fluctuations of the cell. Therefore, fluctuations can be absorbed in each time slot constant in  
10 communication speed, and the capacity of each buffer is always enough at the minimum capacity (the capacity enough to accommodate communication speed in each time slot) regardless of the communication speed of virtual path, and the memory is composed in a simple structure.

15           In the cell disassembly method according to still another aspect of this invention, the storing step comprises a step of accumulating data after start of communication by writing data distributed in each time slot into the buffer, a step of reading out the data from the buffer, parallel  
20 to writing, when the data accumulated amount in the buffer at the accumulating step reaches a prescribed amount, and a step of sending out the read data to the STM circuit interface.

            According to the above-mentioned cell disassembly  
25 method, the accumulating step accumulates data after start



of communication by writing data distributed in each time slot into the buffer, the reading and writing step reads out the data from the buffer, parallel to writing, when the data accumulated amount in the buffer at the accumulating  
5 step reaches a prescribed amount, and the sending step sends out the read data to the STM circuit interface. Therefore, fluctuations can be absorbed in a simple procedure.

In the cell disassembly method according to still another aspect of this invention, the storing step comprises  
10 a step of accumulating data after start of communication by writing data distributed in each time slot into the buffer, a step of reading out the data from the buffer, parallel to writing, when data is accumulated at the accumulating step for a first prescribed time, and a step of sending out  
15 the read data to the STM circuit interface.

According to the above-mentioned cell disassembly method, the accumulating step accumulates data after start of communication by writing data distributed in each time slot into the buffer, the reading and writing step reads  
20 out the data from the buffer, parallel to writing, when the data is accumulated at the accumulating step for a first prescribed amount, and the sending step sends out the read data to the STM circuit interface. Therefore, fluctuations can be absorbed in a simple procedure.

25 The cell disassembly method according to still another

aspect of this invention further comprises a step of setting the prescribed amount or first prescribed time.

According to the above-mentioned cell disassembly method, the prescribed amount or first prescribed time can be set at the setting step. Therefore, the prescribed amount or first prescribed time can be adjusted depending on the environments of use.

The cell disassembly method according to still another aspect of this invention further comprises a step of measuring fluctuations of the cell, in which the setting step sets the value of the prescribed amount or first prescribed time on the basis of the result of measurement at the measuring step.

According to the above-mentioned cell disassembly method, the measuring step measures fluctuations of the cell, and the setting step sets the value of the prescribed amount or first prescribed time on the basis of the result of measurement at the measuring step. Therefore, the prescribed amount or first prescribed time can be adjusted automatically and appropriately.

In the cell disassembly method according to still another aspect of this invention, the prescribed amount or first prescribed time is present independently in each buffer, and the reading and writing step determines the reading-start timing from the buffer independently in each buffer.



the prescribed amount or passing the prescribed first time from start of communication, in more than a specified number of buffers out of one or two or more buffers corresponding to a same virtual path.

5           According to the above-mentioned cell disassembly method, the reading and writing step starts reading action from all buffers corresponding to the virtual path when the data accumulated amount reaches the prescribed amount or passing the prescribed first time from start of communication,  
10 in more than a specified number, for example, one or more of buffers out of one or two or more buffers corresponding to a same virtual path. Therefore, in a simple method, the reading-start timing in every one or two or more buffers corresponding to each virtual path can be controlled.

15           In the cell disassembly method according to still another aspect of this invention, the reading and writing step starts reading action from all buffers corresponding to the virtual path when the data accumulated amount reaches the prescribed amount or passing the prescribed first time  
20 from start of communication, in all buffers out of one or two or more buffers corresponding to a same virtual path.

          According to the above-mentioned cell disassembly method, the reading and writing step starts reading action from all buffers corresponding to the virtual path when the  
25 data accumulated amount reaches the prescribed amount or



stops writing and reading in these buffers, and resumes writing so that the data belonging to a same frame period may be accumulated uniformly at the beginning of these buffers, and resumes reading out when the data accumulated amount in these buffers reaches again the prescribed amount or passing a second prescribed time after execution of resetting.

According to the above-mentioned cell disassembly method, the reading and writing step, when an underflow occurs in any one of one or two or more buffers corresponding to a same virtual path, resets all buffers corresponding to this virtual path, and once stops writing and reading in these buffers, and resumes writing so that the data belonging to a same frame period may be accumulated uniformly at the beginning of these buffers, and resumes reading out when the data accumulated amount in these buffers reaches again the prescribed amount or passing a second prescribed time after execution of resetting, and therefore if an underflow occurs, a normal communication can be recovered promptly.

In the cell disassembly method according to still another aspect of this invention, the reading and writing step resets, when an overflow occurs in the buffer, the buffer having the overflow, once stops reading out from this buffer, and resumes reading out when the data accumulated amount

reaches again the prescribed amount or passing a second prescribed time after execution of resetting.

According to the above-mentioned cell disassembly method, the reading and writing step resets, when an overflow occurs in the buffer, the buffer having the overflow, once stops reading out from this buffer, and resumes reading out when the data accumulated amount reaches again the prescribed amount or passing a second prescribed time after execution of resetting, and therefore if an overflow occurs, a normal communication can be recovered promptly.

In the cell disassembly method according to still another aspect of this invention, the reading and writing step, when an overflow occurs in any one of one or two or more buffers corresponding to a same virtual path, resets  
15 all buffers corresponding to this virtual path, and once stops writing and reading in these buffers, and resumes writing so that the data belonging to a same frame period may be accumulated uniformly at the beginning of these buffers, and resumes reading out when the data accumulated  
20 amount in these buffers reaches again the prescribed amount or passing a second prescribed time after execution of resetting.

According to the above-mentioned cell disassembly method, the reading and writing step, when an overflow occurs  
25 in any one of one or two or more buffers corresponding to

a same virtual path, resets all buffers corresponding to this virtual path, and once stops writing and reading in these buffers, and resumes writing so that the data belonging to a same frame period may be accumulated uniformly at the beginning of these buffers, and resumes reading out when the data accumulated amount in these buffers reaches again the prescribed amount or passing a second prescribed time after execution of resetting, and therefore if an overflow occurs, a normal communication can be recovered promptly.

In the cell disassembly method according to still another aspect of this invention, the reading and writing step once stops, when an overflow occurs in the buffer, writing into the buffer having the overflow, and resumes writing when the data accumulated amount in this buffer decreases to the prescribed amount or passing a second prescribed time after occurrence of overflow.

According to the above-mentioned cell disassembly method, the reading and writing step once stops, when an overflow occurs in the buffer, writing into the buffer having the overflow, and resumes writing when the data accumulated amount in this buffer decreases to the prescribed amount or passing a second prescribed time after occurrence of overflow, and therefore if an overflow occurs, a normal communication can be recovered promptly.

In the cell disassembly method according to still







According to the above-mentioned computer-readable recording medium, since the method of the invention can be executed by the computer, both increase of total capacity of the memory for absorbing fluctuations and complication of memory control circuit can be suppressed, so that the cost can be reduced.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a system for transmitting and receiving data on STM circuit through ATM network by means of a cell assembly and disassembly device in a first embodiment of the invention; Fig. 2 is a functional block diagram showing a configuration of the cell assembly and disassembly device in the first embodiment of the invention; Fig. 3 is a functional block diagram showing a configuration of cell disassembly unit in the first embodiment shown in Fig. 2; Fig. 4 is a functional block diagram showing a configuration of fluctuation absorption buffer unit in the first embodiment shown in Fig. 3; Fig. 5 is a flowchart showing flow of fluctuation absorption process in the first embodiment; Fig. 6 is a flowchart showing flow of underflow process in the first embodiment; Fig. 7 is a flowchart showing flow of overflow process in the first embodiment; Fig. 8 is a flowchart showing other flow of overflow process in the first embodiment; Fig. 9 is a

functional block diagram showing a configuration of cell  
disassembly unit in a second embodiment of the invention;  
Fig. 10 is a flowchart showing flow of fluctuation absorption  
process in the second embodiment; Fig. 11 is a flowchart  
5 showing flow of underflow process in the second embodiment;  
Fig. 12 is a flowchart showing flow of overflow process in  
the second embodiment; Fig. 13 is a flowchart showing other  
flow of overflow process in the second embodiment; Fig. 14  
is a functional block diagram showing a configuration of  
10 cell disassembly unit in a third embodiment of the invention;  
Fig. 15 is an explanatory diagram showing a method of  
determining reading-start timing in the third embodiment;  
Fig. 16 is an explanatory diagram showing other method of  
determining reading-start timing in the third embodiment;  
15 Fig. 17 is a flowchart showing flow of fluctuation absorption  
process in the third embodiment; Fig. 18 is a flowchart  
showing flow of underflow process in the third embodiment;  
Fig. 19 is a flowchart showing flow of overflow process in  
the third embodiment; Fig. 20 is a flowchart showing other  
20 flow of overflow process in the third embodiment; Fig. 21  
is a functional block diagram showing a configuration of  
cell disassembly unit in a fourth embodiment of the  
invention; Fig. 22 is a flowchart showing flow of fluctuation  
absorption process in the fourth embodiment; Fig. 23 is a  
25 flowchart showing flow of underflow process in the fourth

D9557494.060601

embodiment; Fig. 24 is a flowchart showing flow of overflow process in the fourth embodiment; Fig. 25 is a flowchart showing other flow of overflow process in the fourth embodiment; Fig. 26 is a functional block diagram showing a system for transmitting and receiving data on STM circuit through ATM network by means of a cell assembly and disassembly device in a prior art; Fig. 27 is a functional block diagram showing a configuration of the conventional cell assembly and disassembly device shown in Fig. 26; Fig. 28 is an explanatory diagram showing a cell format used in a conventional structured data transfer method; Fig. 29 is a functional block diagram showing a configuration of a conventional cell disassembly unit shown in Fig. 27; and Fig. 30 is a functional block diagram showing a configuration of fluctuation absorption buffer shown in Fig. 29.

#### BEST MODE FOR CARRYING OUT THE INVENTION

Referring now to the drawings, preferred embodiments of a cell disassembly device, a cell disassembly method, and a computer-readable recording medium recording a program for executing this method by a computer according to the invention are described specifically below. It must be noted, however, that the invention is not limited to these embodiments alone.

A cell disassembly device in the first embodiment is

a cell assembly and disassembly device comprising buffers provided in each time slot for storing data distributed in each timeslot temporarily, and absorbing delay fluctuations occurring in cell transfer in ATM network, multiplexing  
5 fluctuations occurring in cell transfer, and other cell fluctuations (sometimes merely called fluctuations hereafter).

Fig. 1 is a block diagram showing a system for transmitting and receiving data on STM circuit through ATM  
10 network by means of a cell assembly and disassembly device in the first embodiment of the invention. Same parts as in Fig. 26 are identified with same reference numerals, and their explanation is omitted. In the system shown in Fig. 1, instead of the conventional cell assembly and disassembly  
15 devices 61a, 61b, and 61c shown in Fig. 26, cell assembly and disassembly devices 1a, 1b, and 1c of the first embodiment are disposed.

Fig. 2 is a functional block diagram showing a configuration of the cell assembly and disassembly device  
20 1 (cell assembly and disassembly device 1a, 1b, or 1c) in the first embodiment of the invention. Same parts as in Fig. 27 are identified with same reference numerals, and their explanation is omitted. The cell assembly and disassembly device 1 has a cell disassembly unit 2 of the  
25 first embodiment instead of the cell disassembly unit 74

0957494-060601

of the conventional cell assembly and disassembly device 61.

Fig. 3 is a functional block diagram showing a configuration of the cell disassembly unit 2 in the first embodiment shown in Fig. 2. The cell disassembly unit 2 comprises an AAL1 processor 12 for extracting the VPI, frame boundary information and data from the received cell, and transmitting the VPI and frame boundary information to a write controller 13 and data to a fluctuation absorption buffer unit 11, the fluctuation absorption buffer unit 11 for temporarily storing the data extracted from the payload of the received cell separately in each time slot (TS), and absorbing the fluctuation, the write controller 13 for analyzing the received VPI, judging the sender (virtual path 65), and generating a write signal to the fluctuation absorption buffer unit 11 on the basis the result and frame boundary information, a buffer monitor unit 14 for monitoring the data accumulated amount in the fluctuation absorption buffer unit 11 in every time slot (TS), and controlling the operation of the write controller 13, read controller 15, and fluctuation absorption buffer unit 11 on the basis the result and the reading-start threshold from a reading-start threshold setting unit 16, the read controller 15 for reading out the data from the fluctuation absorption buffer unit 11 according to the timing information from the STM circuit

09557494 060601  
1999.12.29

interface unit 72 and distributing into necessary time slots,  
 the reading-start threshold setting unit 16 for noticing  
 the reading-start threshold used in control of the timing  
 for starting reading (reading-start timing) from a buffer  
 22 described below to the buffer monitor unit 14, and a VP/TS  
 conversion table 17 for storing the corresponding relation  
 of the virtual path 65 and distribution time slots, and  
 noticing to the write controller 13 and read controller 15.

The fluctuation absorption buffer unit 11 is provided  
 as a sub-block in the cell disassembly unit 2 same as in  
 the prior art. The configuration and cell format of the  
 cell assembly and disassembly device 1 are same as the  
 configuration and cell format of the conventional cell  
 assembly and disassembly device 61 shown in Fig. 27 and Fig.  
 28, except that the internal structure of the absorption  
 fluctuation buffer unit 11 is mainly different.

Fig. 4 is a functional block diagram showing a  
 configuration of the fluctuation absorption buffer unit 11  
 in the first embodiment shown in Fig. 3. The fluctuation  
 absorption buffer unit 11 has individual buffers B1 (TS#1)  
 to Bn (TS#n) (buffers of the invention) provided in each  
 time slot, and comprises a time slot buffer 22 for storing  
 write data temporarily in each time slot individually, a  
 separator 21 for distributing write data from the AAL1  
 processor 12 into individual buffers B1 to Bn in the time

09057494 060601





information is also predicted and compensated. When a wrong cell insertion is detected, the wrong inserted cell is discarded. Later, the information extracted from the payload of the received cell is transmitted to the fluctuation absorption buffer unit 11, and the frame boundary information is transmitted to the write controller 13.

The write controller 13 analyzes the VPI received from the AAL1 processor 12, judges the sender (virtual path 65), determines the on/off timing of the write signal provided in each time slot from the result of this judgment, the VP (virtual path 65)/ TS (time slot) conversion information received from the VP/TS conversion table 17 and the frame boundary information received from the AAL1 processor 12, generates a write signal according to the result of decision, and transmits to the fluctuation absorption buffer unit 11 and buffer monitor unit 14. The fluctuation absorption buffer unit 11 stores, according to the write signal received from the write controller 13, the data received from the AAL1 processor 12 temporarily in the individual buffers B1 to Bn prepared in each time slot (TS#1 to TS#n) by dividing and distributing in time slot units.

The buffer monitor unit 14 monitors the data accumulated amount held in the time slot buffer 22 in every individual buffers B1 to Bn, from the write signal from the write controller 13 and read signal from the read controller

15, and controls the operation of the write controller 13 and read controller 15 according to the result of monitoring. For example, the data accumulating amount in the individual buffers B1 to Bn which are empty upon start of communication gradually increases by turning on the write action instruction and turning off the read action instruction until reaching the reading-start thresholds TH1 to THn by write action, and when the data accumulated amount reaches the reading-start thresholds, the read action instruction is also turned on sequentially.

If an underflow or an overflow is detected in the individual buffers B1 to Bn, it is noticed to the reading-start threshold setting unit 16. An underflow is a state of individual buffers B1 to Bn becoming empty, not allowing to read out any longer, and an overflow is a state of the accumulated amount exceeding a specified threshold. This specific threshold is, for example, 2 times as much as the reading-start threshold, and the reading-start thresholds TH1 to THn should not be more than half of the capacity of the individual buffers B1 to Bn.

The read controller 15, when the reading-start instruction from the buffer monitor unit 14 is ON, generates read signals to be distributed correctly into the time slots in which read data is distributed, according to the instructions from the VP/TS conversion table 17 (showing



independently in the individual buffers B1 to Bn by the buffer monitor unit 14. Setting or change of reading-start thresholds TH1 to THn held in the reading-start threshold setting unit 16 may be operated by the user or manager by means of DIP switch not shown in the diagram, or from a device managing unit 75 through control bus not shown, or by using an original setting panel.

In this constitution, the operation of the first embodiment is explained below by referring to the flowchart in Fig. 5 to Fig. 8. The same parts as in the prior art mentioned above are not explained, and only the characteristic parts of the invention different from the prior art, that is, steps of absorbing fluctuations (fluctuation absorption process) conducted in the cell disassembly unit 2 are explained below. Fig. 5 is a flowchart showing flow of fluctuation absorption process in the first embodiment. In the fluctuation absorption process in the first embodiment, first of all, reading-start thresholds TH1 to THn are set in the reading-start threshold setting unit 16 (step S1).

When communication is started, the buffer monitor unit 14 controls the write controller 13, and starts to write the data distributed in each time slot into the corresponding individual buffers B1 to Bn in the time slot buffer 22, and repeats writing only until the data accumulated amount in

the individual buffers B1 to Bn reaches the corresponding reading-start thresholds TH1 to THn (steps S2, S3). When the amount of data accumulated in any one of the individual buffers reaches the reading-start threshold corresponding to the individual buffer, the read controller 15 is controlled, and in this individual buffer, reading is started parallel to writing (step S4). This writing and reading process is executed in a simple first-in first-out (FIFO) principle.

10 In succession, checking for occurrence of underflow or overflow (steps S5, S6), steps S4 to S6 are repeated until underflow or overflow takes place. Herein, the read controller 15 reads out at a specific interval in each time slot, and fluctuations are absorbed. In the event of an underflow, the underflow process mentioned below is executed (step S7), and the process returns to step S4. In the event of an overflow, the overflow process mentioned below is executed (step S8), and the process returns to step S4.

In Fig. 5, for the sake of explanation, step S1 is placed at the beginning of the flowchart, but setting of reading-start thresholds TH1 to THn at step S1 is not required again if once set in the past communication. In the midst of communication, the reading-start thresholds TH1 to THn may be changed (set again). As a result, the reading-start thresholds TH1 to THn can be changed depending on the

09057494.060601

environments.

It is a major feature of the first embodiment that fluctuations are absorbed in each time slot, not in each virtual path 65. Whatever may be the maximum communication speed of the STM circuit interface 62 (for example, whether  
 5 ISDN primary group speed or secondary group speed), the communication speed in each time slot is always 64 kb/s, and the reading-start thresholds TH1 to THn of individual buffers B1 to Bn in each time slot and necessary capacity  
 10 L are basically expressed as follows, same as in the foregoing equations 1 and 2, supposing the maximum of the delay fluctuation determined as the characteristic of the ATM network 63 to be  $\pm D$  (identifier  $k = 1$  to  $n$ ).

$$TH_k = [64\text{kb/s}] \times D \quad \dots (6)$$

$$15 \quad L_k = 2 \times TH_k = 2 \times [64\text{kb/s}] \times D \quad \dots (7)$$

However, if only one time slot is assigned for one virtual path 65, since the received data is written into the time slot buffer 22 in cell unit, in order to cope with such a case, if the calculation result in equation 6 is 47  
 20 bytes (worth 1 cell) or less, it is necessary to express as follows same as in the foregoing equations 3 and 4.

$$TH_k = 48 \text{ bytes (1 cell + 1 byte)} \quad \dots (8)$$

$$L_k = 94 \text{ bytes (2 cells)} \quad \dots (9)$$

As clear from equations 6 to 9,  $TH_k$  and  $L_k$  are always  
 25 constant, not depending on the identifier  $k$ .

Besides, as shown below, the total memory capacity Lt of the time slot buffer 22 is basically same as the total memory capacity Ls of the cell buffer 92 in the common memory method of the prior art.

$$= 2 \times V_{\max} \times D = L_s \quad \dots (10)$$

As known from the explanation so far, since the capacity  $L$  of the individual buffers  $B_1$  to  $B_n$  does not depend on the communication speed of the virtual path 65, same as in the conventional individual memory system, the individual buffers  $B_1$  to  $B_n$  can be composed of simple first-in-first-out





the reading-start threshold corresponding to this individual buffer, reading from this individual buffer is resumed (step S30).

Thus, in the underflow processing in the first  
embodiment, reading from the individual buffer having the  
underflow is once stopped, and when the data accumulated  
amount later reaches the reading-start threshold  
corresponding to this individual buffer again, reading is  
resumed. That is, when an underflow occurs, the operation  
is same as the operation right after start of communication.  
Besides, the reading-start threshold corresponding to the  
individual buffer having the underflow is automatically  
increased by a specified amount. That is, upon every  
occurrence of underflow, the fixed delay added to the data  
is automatically increased by a specific amount each.

Therefore, if an underflow occurs, a normal communication state is recovered promptly, and the fixed delay added to the data for fluctuation absorption can be automatically increased as required. The reading-start thresholds TH1 to THn should not exceed the half value of the capacity of the individual buffers B1 to Bn. Fluctuations are composed of those in the delaying direction and others in advancing direction, which are considered to occur at same probability, and therefore if the reading-start thresholds TH1 to THn exceed the half value of the capacity,

of the individual buffers B1 to Bn, the data may overflow from the individual buffers B1 to Bn.

The overflow processing at step S8 is explained. Fig. 7 is a flowchart showing flow of overflow process in the first embodiment. In the overflow processing in the first embodiment, the buffer monitor unit 14 detecting occurrence of an overflow in any one of the individual buffers B1 to Bn first transmits a reset instruction to the individual buffer having the overflow to the fluctuation absorption buffer 11, and resets this individual buffer. Once turning off the read action instruction to the read controller 15, reading out from the individual buffer having the overflow is stopped temporarily (step S46).

Consequently, the reading-start threshold corresponding to the individual buffer having the overflow is increased by a specified amount (step S47). In succession, until the data accumulated amount in this individual buffer reaches again the reading-start threshold corresponding to this individual buffer, only writing is repeated in this individual buffer (steps S48, S49). When the data accumulated amount in this individual buffer reaches again the reading-start threshold corresponding to this individual buffer, reading from this individual buffer is resumed (step S50).

Thus, in the overflow processing in the first

embodiment, the individual buffer having the overflow is reset, and reading from this individual buffer is once stopped, and when the data accumulated amount later reaches the reading-start threshold corresponding to this individual buffer again, reading is resumed. That is, when an overflow occurs, the operation is same as the operation right after start of communication. Besides, the reading-start threshold corresponding to the individual buffer having the overflow is automatically increased by a specified amount. That is, upon every occurrence of overflow, the fixed delay added to the data is automatically increased by a specific amount each.

Fig. 8 is a flowchart showing other flow of overflow process in the first embodiment. In the overflow processing, the buffer monitor unit 14 detecting occurrence of an overflow in any one of the individual buffers B1 to Bn once turns off the write action instruction to the write controller 13, and temporarily stops writing into the individual buffer having the overflow (step S66). Consequently, the reading-start threshold corresponding to the individual buffer having the overflow is increased by a specified amount (step S67). In succession, until the data accumulated amount in this individual buffer decreases again to the reading-start threshold corresponding to this individual buffer, only reading is repeated in this

individual buffer (steps S68, S69). When the data accumulated amount in this individual buffer decreases again to the reading-start threshold corresponding to this individual buffer, writing is resumed (step S70).

- 5           Thus, in this overflow processing, writing into the individual buffer having the overflow is once stopped, and when the data accumulated amount decreases to the reading-start threshold corresponding to this individual buffer again, writing is resumed. That is, when an overflow
- 10 occurs, the write operation and read operation are opposite to the operation at the time of underflow (writing and reading being exchanged mutually). Besides, the reading-start threshold corresponding to the individual buffer having the overflow is automatically increased by a specified amount.
- 15 That is, upon every occurrence of overflow, the fixed delay added to the data is automatically increased by a specific amount each.

- By these overflow processes, if an overflow occurs, a normal communication state is recovered promptly, and the
- 20 fixed delay added to the data for fluctuation absorption can be automatically increased as required. Further, if the threshold for overflow detection is set at 2 times the reading-start thresholds TH1 to THn, along with elevation of the reading-start thresholds TH1 to THn, the threshold
- 25 for overflow detection climbs up, and the probability of

occurrence of overflow decreases.

Same as in the occurrence of underflow, the reading-start thresholds TH1 to THn should not exceed the half value of the capacity of the individual buffers B1 to Bn. Fluctuations are composed of those in the delaying direction and others in advancing direction, which are considered to occur at same probability, and therefore if the reading-start thresholds TH1 to THn exceed the half value of the capacity of the individual buffers B1 to Bn, the data may overflow from the individual buffers B1 to Bn.

As described herein, according to the first embodiment, since fluctuations are absorbed in each time slot, instead of each virtual path 65, after distributing data into time slots, increase of total memory capacity and complication of memory control circuit can be suppressed. In other words, both decrease of total memory capacity and simplification of memory control circuit can be realized at the same time. In the event of an underflow, reading from the individual buffer having the underflow is once stopped, and when the data accumulated amount later reaches again the reading-start threshold corresponding to this individual buffer, reading is resumed, so that a normal communication state is recovered promptly in a simple procedure in the event of an underflow.

Similarly, in the event of an overflow, the individual

buffer having the overflow is reset, and reading from this individual buffer is once stopped, and when the data accumulated amount later reaches again the reading-start threshold corresponding to this individual buffer, reading is resumed, or writing into the individual buffer having the overflow is once stopped, and when the data accumulated amount later decreases again to the reading-start threshold corresponding to this individual buffer, writing is resumed, and therefore a normal communication state is recovered promptly in a simple procedure in the event of an overflow.

Moreover, on every occurrence of underflow or overflow, the fixed delay added to the data is automatically increased by a specific amount each, and the fixed delay added to the data for fluctuation absorption can be increased automatically as required. Further, the reading-start threshold used initially upon start of communication and the reading-start threshold used after occurrence of underflow or overflow may be different from each other, but when they are set as the same reading-start thresholds TH1 to THn, the change of reading-start threshold upon occurrence of underflow or overflow may be also reflected upon start of communication.

In the first embodiment, the reading-start timing from the time slot buffer 22 is "when the buffer monitor unit 25 14 detects for the first time that the data accumulated amount

in the individual buffers B1 to Bn reaches the reading-start thresholds TH1 to THn," but in the second embodiment, by contrast, it is the time "when the buffer monitor unit 14 detects the lapse of time after start of communication  
5 reaches the reading-start wait time W1 to Wn." That is, in the first embodiment, the data accumulated mount is the trigger of reading start, whereas in the second embodiment, the lapse of time after start of communication is the trigger of reading start.

10 The second embodiment is basically same as the first embodiment in configuration, and explanation is omitted in same parts, and only different parts are explained below. Fig. 9 is a functional block diagram showing a configuration of cell disassembly unit in the second embodiment of the  
15 invention. Same parts as in Fig. 3 are identified with same reference numerals. The cell disassembly unit 31 in the second embodiment comprises a buffer monitor unit 32 and a reading-start wait time setting unit 33, instead of the buffer monitor unit 2 and reading-start threshold setting  
20 unit 16 in the cell disassembly unit 2 in the first embodiment.

The reading-start wait time setting unit 33 is similar to the reading-start threshold setting unit 16 in the first embodiment in configuration and operation, but differs that it stores reading-start wait times W1 to Wn for individual  
25 buffers B1 to Bn in the time slot buffer 22, instead of red

D9557494 "060601



start thresholds TH1 to THn, and that it notices them to the buffer monitor unit 32. Setting or change of reading-start wait times W1 to Wn in the reading-start wait time setting unit 33 may be operated by the user or manager  
5 by means of DIP switch not shown in the diagram, or from a device managing unit 75 through control bus not shown, or by using an original setting panel.

The buffer monitor unit 32 is same as the buffer monitor unit 14 in the first embodiment in configuration, but is  
10 slightly different in operation. The buffer monitor unit 32 monitors the write signal from the write controller 13 in every individual buffers B1 to Bn, and controls the reading-start timing according to the result. For example, by monitoring the write signal, the communication start  
15 timing of each one of individual buffers B1 to Bn is detected, and when communication is started, internal timers T1 to Tn, not shown, provided in individual buffers B1 to Bn are operated, and the lapse of time after start of communication is measured.

20 The result of measurement of lapse of time and reading-start wait times W1 to W2 from the reading-start wait time setting unit 33 are compared, and the write operation instruction is turned on and the read operation instruction is turned off until the lapse of time reaches  
25 the reading-start wait times W1 to Wn, and the read operation

instruction is also turned on to start reading sequentially from the one reaching the lapse of time of W1 to Wn. If an underflow or overflow is detected in the individual buffers B1 to Bn, it is noticed to the reading-start wait time setting unit 33. Receiving this notice, the reading-start wait time setting unit 33 changes the reading-start wait time.

In the second embodiment having such configuration, the operation is explained below by referring to the flowcharts in Fig. 10 to Fig. 13. In the second embodiment, the operation is same as in the first embodiment, and explanation is omitted as for same parts, and only different parts are explained. Fig. 10 is a flowchart showing flow of fluctuation absorption process in the second embodiment. Same parts as in Fig. 5 are identified with same reference numerals. In the fluctuation absorption process in the second embodiment, instead of setting of reading-start thresholds TH1 to THn at step S1, the reading-start wait times W1 to Wn is set (step S11). Further, instead of judging whether the data accumulated amount in the individual buffers B1 to Bn has reached the reading-start thresholds TH1 to THn or not at step S3, it is judged whether passing the reading-start wait times W1 to Wn or not at step S12.

That is, once communication is started, the buffer  
25 monitor unit 32 controls the write controller 13, starts

the process of writing data distributed into time slots into individual corresponding buffers B1 to Bn in the time slot buffer 22, and repeats writing only until the lapse of time from start of communication of the individual buffers W1 to Wn reaches the corresponding reading-start wait times W1 to Wn (steps S2, S12). When the lapse of time from start of communication of any one of the individual buffers reaches the reading-start wait time corresponding to the individual buffer, the read controller 15 is controlled, and writing and reading are started simultaneously in this individual buffer (step S4).

Instead of the underflow processing at step S7 and overflow processing at step S8, the underflow processing at step S13 and overflow processing at step S14 mentioned below are executed. In Fig. 10, for the sake of explanation, step S11 is placed at the beginning of the flowchart, but setting of reading-start wait times W1 to Wn at step S11 is not required again if once set in the past communication. In the midst of communication, the reading-start wait times W1 to Wn may be changed (set again). As a result, the reading-start wait times W1 to Wn can be changed depending on the environments.

The underflow processing at step S13 is explained below. Fig. 11 is a flowchart showing flow of underflow process in the second embodiment. Same parts as in Fig. 6 are

09057494 "060601

identified with same reference numerals. In the underflow processing in the second embodiment, instead of increasing the reading-start threshold by a specified amount at step S27, the reading-start wait time is extended by a specified  
5 time at step S31. Further, instead of judging if the data accumulated amount in the individual buffer having the underflow has reached the reading-start threshold again at step S29, it is judged at step S32, after occurrence of underflow, if passing over the reading-start wait time  
10 corresponding to the individual buffer having the underflow.

That is, the buffer monitor unit 32 detecting occurrence of underflow at individual buffers B1 to Bn once turns off the read operation instruction corresponding to the read controller 15, and once stops reading from the  
15 individual buffer having the underflow (step S26), and extends the reading-start wait time for the individual buffer having the underflow by a specified time (step S31). Until the time of lapse after occurrence of underflow reaches the reading-start wait time corresponding to this individual  
20 buffer, only writing is done in this individual buffer (steps S28, S32), and then reading is resumed (step S30).

The overflow processing at step S14 is explained below. Fig. 12 is a flowchart showing flow of overflow process in the second embodiment. Same parts as in Fig. 7 are identified  
25 with same reference numerals. In the overflow processing

0057494.060601



8 are identified with same reference numerals. In this overflow processing, instead of increasing the reading-start threshold at step S67, the reading-start wait time is extended by a specified time at step S71 (in this case, when the reading-start wait time is shortened, the fixed delay added to the data is increased). Further, instead of judging if the data accumulated amount in the individual buffer having the underflow has decreased to the reading-start threshold at step S69, it is judged at step S72, after occurrence of overflow, if passing over the reading-start wait time corresponding to this individual buffer.

That is, the buffer monitor unit 32 detecting occurrence of overflow at individual buffers B1 to Bn once turns off the write operation instruction to the write controller 13, and stops writing into the individual buffer having the overflow (step S66), and shortens the reading-start wait time corresponding to the individual buffer having the overflow by a specified time (step S71). Until passing over the reading-start wait time corresponding to this individual buffer, only reading is repeated in this individual buffer (steps S68, S72), and then writing is resumed (step S70).

Thus, according to the second embodiment, upon start of communication or in the event of overflow or underflow,

090607494 "060601

if reading or writing is controlled depending on the lapse of time, the same effects as in the first embodiment are obtained.

In the first embodiment, the reading-start thresholds  
5 TH1 to THn are held in the reading-start threshold setting unit 16 in each time slot, and the reading-start timing in the buffer monitor unit 14 is controlled in each time slot, but in the third embodiment, it is designed to control in every virtual path 65. That is, the reading-start timing  
10 is independently determined in the individual buffers B1 to Bn in the first embodiment, whereas in the third embodiment it is designed to determine the reading-start timing in batch by grouping the individual buffers B1 to Bn into those corresponding to one same virtual path 65.

15 The third embodiment is basically same as the first embodiment in configuration, and only different parts are explained. Fig. 14 is a functional block diagram showing a configuration of cell disassembly unit in the third embodiment of the invention. Same parts as in Fig. 3 are  
20 identified with same reference numerals. A cell disassembly unit 41 in the third embodiment comprises a buffer monitor unit 42 and a reading-start threshold setting unit 43, instead of the buffer monitor unit 14 and reading-start threshold setting unit 16 of the cell disassembly unit 2  
25 in the first embodiment.

D667404-060601

The reading-start threshold setting unit 43 is same as the reading-start threshold setting unit 16 in the first embodiment in configuration and operation, except that the reading-start thresholds VPTH1 to VPTHm in every virtual path 65 same as in the prior art are held, instead of the reading-start thresholds TH1 to THn in every time slot, by receiving VP/TS conversion information from the VP/TS conversion table 17, and they are noticed to the buffer monitor unit 42. Setting or change of reading-start thresholds VPTH1 to VPTHm in the reading-start threshold setting unit 43 may be operated by the user or manager by means of DIP switch not shown in the diagram, or from a device managing unit 75 through control bus not shown, or by using an original setting panel.

The buffer monitor unit 42 is composed same as in the first embodiment, and monitors the write signal from the write controller 13 in individual buffers B1 to Bn same as in the first embodiment, and determines the reading-start timing on the basis of the result, but those corresponding to a same virtual path 65 are grouped together to be controlled to start reading at the same time. By such control, it is assured more securely than in the first embodiment that the data to be issued in the same frame in the STM circuit interface 62 are actually issued in the same frame. If an underflow or overflow occurs in the individual buffers B1 to Bn, it

03657434-060601



is noticed to the reading-start threshold setting unit 43. Receiving this notice, the reading-start threshold setting unit 43 changes the reading-start threshold.

The method of determining the reading-start timing of the grouped individual buffers B1 to Bn is explained by referring to Fig. 15. Fig. 15 is an explanatory diagram in which three individual buffers B1 to B3 are grouped together. As shown in the diagram, the data accumulated amounts in the individual buffers B1 to B3 are not always the same. It is highly possible that more data is accumulated temporarily in the time slot of earlier (smaller) number. In the determining method of reading-start timing in the third embodiment, when the accumulated data amount in one of the individual buffers in the group reaches the reading-start threshold VPTh1 corresponding to the group, it is controlled to start reading from all individual buffers B1 to B3 in this group.

That is, the reading-start timing from the grouped individual buffers B1 to Bn is "the moment the buffer monitor unit 42 first detects that the data accumulated amount in any one of the individual buffers in the group reaches the reading-start threshold corresponding to the group." In other words, the reading-start timing is determined by the "OR condition" in the group.

Fig. 16 is an explanatory diagram showing other method

of determining reading-start timing in the third embodiment, in which three individual buffers B1 to B3 are grouped together same as in Fig. 15. As shown in the diagram, when the data accumulated amount in all individual buffers in the group reaches the reading-start threshold VPTH1, it is controlled to start reading from all of individual buffers B1 to B3 in the group. That is, the reading-start timing is "the moment the buffer monitor unit 42 first detects that the data accumulated amount in all of the individual buffers in the group reaches the reading-start threshold corresponding to the group." In other words, the reading-start timing is determined by the "AND condition" in the group.

Further, it may be defined to be "the moment the buffer monitor unit 42 first detects that the data accumulated amount in a specified number (an arbitrary number from one to all) of the individual buffers in the group reaches the reading-start threshold corresponding to the group." Thus, in the third embodiment, the reading-start timing can be determined easily in each virtual path 65, and the cost can be reduced.

The operation of the third embodiment having such configuration is explained by referring to Fig. 17 to Fig. 20. Same parts as in the first embodiment are not explained, and only different parts are explained below. Fig. 17 is



in at least one individual buffer reaches the reading-start threshold corresponding to this group, reading of all individual buffers in this group is started (step S4).

Instead of the underflow process S7 and overflow process S8, the underflow process S18 and overflow process S19 mentioned below are executed. In Fig. 17, for the sake of explanation, step S16 is placed at the beginning of the flowchart, but setting of reading-start thresholds VPTH1 to VPTHm at step S1 is not required again if once set in the past communication. In the midst of communication, the reading-start thresholds VPTH1 to VPTHm may be changed (set again). As a result, the reading-start thresholds VPTH1 to VPTHm can be changed depending on the environments.

The underflow process at step S18 is explained. Fig. 18 is a flowchart showing flow of underflow process in the third embodiment. In the underflow processing in the third embodiment, the buffer monitor unit 42 detecting occurrence of underflow in the individual buffers B1 to Bn first transmits the reset instruction for the individual buffers B1 to Bn having the underflow and all individual buffers (of a same group) corresponding to a same virtual path 65, to the fluctuation absorption buffer 11, and resets these individual buffers. The write operation instruction to the write controller 13 and read operation instruction to the read controller 15 are once turned off, and processing of

writing and reading in these individual buffers is once stopped (step S35).

Thus, if an underflow occurs in any one of the individual buffers (of a same group) corresponding to a same virtual path 65, all individual buffers corresponding to this virtual path 65 are reset, and writing and reading are

stopped once, and then writing is started so that the data belonging to the same frame period may be accumulated uniformly at the beginning of these individual buffers, and further when the data accumulated amount in one or all of the individual buffers in this group reaches the reading-start threshold corresponding to this group, reading of all individual buffers in the group is resumed.

That is, in the underflow processing, after resetting all individual buffers corresponding to the same virtual path 65, the same operation as the operation right after start of communication is done. Besides, the reading-start threshold corresponding to the group having the underflow is automatically increased by a specified amount. That is, upon every occurrence of underflow, the fixed delay added to the data is automatically increased by a specific amount each.

Therefore, if an underflow occurs, a normal communication state is recovered promptly, and the fixed delay added to the data for fluctuation absorption can be automatically increased as required. The reading-start thresholds  $VPTH_1$  to  $VPTH_m$  should not exceed the half value of the capacity of the individual buffers  $B_1$  to  $B_n$ . Fluctuations are composed of those in the delaying direction and others in advancing direction, which are considered to occur at same probability, and therefore if the reading-start

00057494-000001



reading-start threshold corresponding to this group (steps S58, S59).

Herein, in this group, only writing may be executed in these individual buffers until the data accumulated amount in all individual buffers reaches again the reading-start threshold corresponding to this group. Afterwards, in this group, when the data accumulated amount in at least one individual buffer reaches again the reading-start threshold corresponding to this group, reading of all individual buffers in this group is resumed (step S60).

Thus, if an overflow occurs in any one of the individual buffers (of a same group) corresponding to a same virtual path 65, all individual buffers corresponding to this virtual path 65 are reset, and writing and reading are stopped once, and then writing is started so that the data belonging to the same frame period may be accumulated uniformly at the beginning of these individual buffers, and further when the data accumulated amount in one or all of the individual buffers in this group reaches the reading-start threshold corresponding to this group, reading of all individual buffers in the group is resumed. Besides, the reading-start threshold corresponding to the group having the overflow is automatically increased by a specified amount. That is, upon every occurrence of underflow, the fixed delay added to the data is automatically increased by a specific amount

09857494-060601



each.

Fig. 20 is a flowchart showing other flow of overflow process in the third embodiment. In this overflow processing, the buffer monitor unit 42 detecting occurrence of overflow in the individual buffers B1 to Bn first stops writing turning off the write instruction once to the write controller 13, for the individual buffer having the overflow and all individual buffers (of a same group) corresponding to a same virtual path 65 (step S76). Then the reading-start threshold corresponding to this virtual path 65 is increased (step S77).

In this group, consequently, until the data accumulated amount in at least one individual buffer decreases again to the reading-start threshold corresponding to this group, only reading is executed in these individual buffers (steps S78, S79). Herein, in this group, only reading may be executed in these individual buffers until the data accumulated amount in all individual buffers decreases again to the reading-start threshold corresponding to this group. Afterwards, in this group, when the data accumulated amount in at least one individual buffer decreases again to the reading-start threshold corresponding to this group, writing of all individual buffers in this group is resumed (step S80).

Thus, if an overflow occurs in any one of the individual

09857494-060601

09057494.060601

buffers corresponding to a same virtual path 65, writing in all individual buffers corresponding to this virtual path 65 is once stopped, and writing is resumed when the data accumulated amount in one or all of the individual buffers decreases again to the reading-start threshold. That is, in the event of an overflow, the write operation and read operation are reverse to the operation in the event of an underflow (mutually exchanging the write operation and read operation). Besides, the reading-start threshold corresponding to the group having the overflow is automatically increased by a specified amount. That is, upon every occurrence of overflow, the fixed delay added to the data is automatically increased by a specific amount each.

Therefore, if an overflow occurs, a normal communication state is recovered promptly, and the fixed delay added to the data for fluctuation absorption can be automatically increased as required. Further, if the threshold for overflow detection is set at 2 times of the reading-start thresholds  $VPTH_1$  to  $VPTH_m$ , along with the elevation of reading-start thresholds  $VPTH_1$  to  $VPTH_m$ , the threshold for overflow detection also climbs up, and the probability of overflow is lowered. The reading-start thresholds  $VPTH_1$  to  $VPTH_m$  should not exceed the half value of the capacity of the individual buffers  $B_1$  to  $B_n$ .

Fluctuations are composed of those in the delaying direction and others in advancing direction, which are considered to occur at same probability, and therefore if the reading-start thresholds  $VP_{TH1}$  to  $VP_{THm}$  exceed the half value of the capacity of the individual buffers  $B1$  to  $Bn$ , the data may overflow from the individual buffers  $B1$  to  $Bn$ .

Thus, according to the third embodiment, the same effects as in the first embodiment are obtained, and further those corresponding to a same virtual path 65 are grouped together and controlled to start reading at the same time, and it hence heightens the probability that the data to be issued in the same frame in the STM circuit interface 62 may be actually issued in the same frame.

In the third embodiment, the data accumulated amount is used as the trigger for starting reading, whereas in the fourth embodiment the trigger for starting reading is the lapse of time after start of communication. In the first to third embodiments, the value of the reading-start threshold or reading-start wait time held in the reading-start threshold setting unit or reading-start wait time setting unit can be "changed by the instruction of the user or manager of the device" by means of DIP switch or setting through a control bus from the device managing unit 75, but in the fourth embodiment, the value can be "changed automatically by measuring the maximum value of the delay



unit 52 monitors the write signal from the write controller 13 in individual buffers B1 to Bn, determines the reading-start timing on the basis of the result, and controls to start reading at the same time by grouping together as for those corresponding to a same virtual path 65. For example, by monitoring the write signal, the communication start timing of each one of individual buffers B1 to Bn is detected, and when communication is started, internal timers T1 to Tn, not shown, provided in individual buffers B1 to Bn are started to measure the lapse of time from start of communication. The result of measurement of lapse of time and reading-start wait times VPW1 to VPWm from the reading-start wait time setting unit 53 are compared, and the write operation instruction is kept ON and the read operation instruction is kept OFF until the lapse of time reaches VPW1 to VPWm.

The read operation instruction is turned on simultaneously in all buffers in the same group. The timing for turning on the read operation instruction (reading-start timing) may be either the moment the lapse of time after start of communication reaches the reading-start wait time in any one of the buffers in the group, or the moment the lapse of time after start of communication reaches the reading-start wait time in all of the buffers in the group.

The buffer monitor unit 52, after the reading-start

timing is determined, continues to monitor the data accumulated amount in the individual buffers B1 to Bn, and notices to the reading-start wait time setting unit 53. If an underflow or overflow is detected, it is noticed to the reading-start wait time setting unit 53. Receiving the notice of underflow or overflow, the reading-start wait time setting unit 53 extends the held reading-start wait times VPW1 to VPWm by a specified time.

Setting or changing of reading-start wait times VPW1 to VPWm in the reading-start wait time setting unit 53 may be operated either by the user or manager by using DIP switch or the like same as in the first to third embodiments, or by the reading-start wait time setting unit 53 for measuring the maximum value (effective value D') of delay fluctuations in every virtual path 65 for changing automatically on the basis of the result.

In the latter case, the reading-start wait time setting unit 53 monitors the information of data accumulated amount of individual buffers B1 to Bn sent from the buffer monitor unit 52, and calculates the effective value D' of delay fluctuations in every virtual path 65 from the amount of variations. Later, on the basis of the calculated effective amount D', the reading-start wait times VPW1 to VPWm are changed (optimized) to a minimum value not to induce overflow or underflow. As a result, the fixed delay added to the

09057494.060601

data for fluctuation absorption in the cell disassembly unit 51 can be automatically suppressed to a minimum limit, and appropriate communication is realized.

After the read operation from the time slot buffer 22 has been started, however, if the values of the reading-start wait times VPW1 to VPWm are changed according to the same procedure, there is basically no effect on the operation of the cell disassembly unit 51. Accordingly, the optimized value is applied actually only when the same virtual path 65 is set again after the virtual path 65 is once disconnected, or when an overflow or underflow occurs. Or, in order that the optimized value may be applied instantly, the fluctuation absorption buffer unit 11 may be once reset by force.

In the fourth embodiment having such configuration, the operation is explained by referring to the flowcharts in Fig. 22 to Fig. 25. Same parts as in the first embodiment are not explained, and only different parts are explained herein. Fig. 22 is a flowchart showing flow of fluctuation absorption process in the fourth embodiment. Same parts as in Fig. 17 are identified with same reference numerals.

In the fluctuation absorption process in the fourth embodiment, instead of the setting process of reading-start thresholds VPTH1 to VPTHm at step S16, step S21 and step S22 are processed. That is, the reading-start wait time





buffer 22, and repeats writing only until the lapse of time after start of communication in at least one individual buffer in the group reaches the corresponding reading-start wait time (steps S2, S23). In any group, when the lapse of time after start of communication in at least one individual buffer reaches the reading-start wait time corresponding to this group, reading of all individual buffers in this group is started (step S4). Besides, instead of the underflow process S18 and overflow process S19, the underflow process S24 and overflow process S25 mentioned below are executed.

The underflow process at step S24 is explained. Fig. 23 is a flowchart showing flow of underflow process in the fourth embodiment. Same parts as in Fig. 18 are identified with same reference numerals. In the underflow processing in the fourth embodiment, instead of the process of increasing the reading-start threshold at step S36, the reading-start wait time is extended by a specified time at step S41. Further, instead of step S39 for judging if the data accumulated amount in at least one individual buffer in the group having the underflow has reached the reading-start threshold corresponding to the group or not, it is judged at step S42 if passing over the reading-start wait time corresponding to the group having the underflow after executing of resetting at step S35.

That is, after resetting at step S35, the buffer monitor unit 52 extends the reading-start wait time corresponding to the group having the underflow by a specified time (step S41). After exudation of resetting, until passing over the reading-start wait time corresponding to this group, only writing is executed in the individual buffers in this group (steps S38, S42), and then reading is resumed (step S40).

The overflow process at step S25 is explained. Fig. 24 is a flowchart showing flow of overflow process in the fourth embodiment. Same parts as in Fig. 19 are identified with same reference numerals. In the overflow processing in the fourth embodiment, instead of the process of increasing the reading-start threshold at step S56, the reading-start wait time is extended by a specified time at step S61. Further, instead of step S59 for judging if the data accumulated amount in at least one individual buffer in the group having the overflow has reached the reading-start threshold corresponding to the group or not, it is judged at step S62 if passing over the reading-start wait time corresponding to the group having the overflow after executing of resetting at step S55.

That is, after resetting at step S55, the buffer monitor unit 52 extends the reading-start wait time corresponding to the group having the overflow by a specified time (step 25 S61). After execution of resetting, until passing over the

reading-start wait time corresponding to this group, only writing is executed in the individual buffers in this group (steps S58, S62), and then reading is resumed (step S60).

Fig. 25 is a flowchart showing other flow of overflow process in the fourth embodiment. Same parts as in Fig. 20 are identified with same reference numerals. In this overflow processing, instead of the process of increasing the reading-start threshold at step S77, the reading-start wait time is shortened by a specified time at step S81.

Further, instead of step S79 for judging if the data accumulated amount in at least one individual buffer in the group having the overflow has reached the reading-start threshold corresponding to the group or not, it is judged at step S82 if passing over the reading-start wait time corresponding to the group having the overflow after occurrence of overflow.

That is, after stopping writing at step S76, the buffer monitor unit 52 shortens the reading-start wait time corresponding to the group having the overflow is extended by a specified time (step S81). After occurrence of overflow, until passing over the reading-start wait time corresponding to this group, only reading is executed in the individual buffers in this group (steps S78, S82), and then writing is resumed (step S80).

According to the fourth embodiment, as described

0057494 060601

herein, same effects as in the third embodiment are obtained, and moreover by measuring the effective value  $D'$ , and changing (optimizing) the reading-start wait times  $VPW1$  to  $VPWm$  so as to be a minimum value not to induce overflow or underflow according to the result, the fixed delay added to the data for fluctuation absorption in the cell disassembly unit 51 can be automatically suppressed to a minimum limit, and adequate communication is realized.

This process of optimizing by measuring the effective value D' can be also applied in the first to third embodiments, and the same effects as in the fourth embodiment can be obtained. In this case, in the first embodiment, the reading-start threshold setting unit 16 optimizes the reading-start thresholds TH1 to THn, in the second embodiment, the reading-start wait time setting unit 33 optimizes the reading-start wait times W1 to Wn, and in the third embodiment, the reading-start threshold setting unit 43 optimizes the reading-start thresholds VPTH1 to VPTHm.

In the first to third embodiments, the data interface width between functional blocks is 8 bits and data is transferred in byte units, but same effects are obtained by the different data interface widths or transfer units. The STM interface speed and ATM interface speed are not particularly limited, and may be any speed. The ATM cell is used as the basic transfer unit, but similar effects are

25 is used as the basic transfer unit, but similar effects are

obtained by other transfer units such as packets of different kinds or lengths other than the ATM cells. As the specific transfer method of data on the STM circuit interface 62 by cells through the ATM network 63, the structured data transfer method designated in ITU-T Recommendation I.363.1 is used, but other transfer method having similar function may be also employed.

As described herein, according to one aspect of this invention, the cell disassembly unit stores the data distributed in each time slot temporarily in the buffer provided in each time slot, and absorbs fluctuations of the cell. Therefore, fluctuations can be absorbed in each time slot constant in communication speed, and the capacity of each buffer is always enough at the minimum capacity (the capacity enough to accommodate communication speed in each time slot) regardless of the communication speed of virtual path, and the memory is composed in a simple structure, thereby suppressing both increase of total capacity of memory for absorbing fluctuations and complication of memory circuit, and reducing the cost.

According to another aspect of this invention, the cell disassembly unit accumulates data after start of communication by writing data distributed in each time slot into the buffer, reads out the data from the buffer, parallel to writing, when the data accumulated amount in the buffer

reaches a prescribed amount, and sends out the read data to the STM circuit interface, and therefore, fluctuations can be absorbed in a simple procedure.

According to still another aspect of this invention,  
5 the cell disassembly unit accumulates data after start of communication by writing data distributed in each time slot into the buffer, reads out the data from the buffer, parallel to writing, when passing a first prescribed amount, and sends out the read data to the STM circuit interface, and therefore,  
10 fluctuations can be absorbed in a simple procedure.

According to still another aspect of this invention, the prescribed amount or first prescribed time can be set by the setting unit. Therefore, the prescribed amount or first prescribed time can be adjusted depending on the  
15 environments of use, thereby decreasing addition of fixed delay more than necessary or overflow or underflow, and realizing adequate communication.

According to still another aspect of this invention, the measuring unit measures fluctuations of the cell, and  
20 the setting unit sets the value of the prescribed amount or first prescribed time on the basis of the result of measurement by the measuring unit. Therefore, the prescribed amount or first prescribed time can be adjusted automatically and appropriately, so that an adequate  
25 communication is realized.

According to still another aspect of this invention, the prescribed amount or first prescribed time is present independently in each buffer, and the cell disassembly unit determines the reading-start timing from the buffer independently in each buffer, and therefore the reading-start timing can be controlled finely in each buffer.

According to still another aspect of this invention, the prescribed amount or first prescribed time is present independently in each virtual path, and the cell disassembly unit determines the reading-start timing from the buffer independently in every one or two or more buffers corresponding to each virtual path, and therefore it is higher in probability that the data to be issued in a same frame is actually issued in the same frame, thereby realizing adequate communication.

According to still another aspect of this invention, the cell disassembly unit starts reading action from all buffers corresponding to the virtual path when the data accumulated amount reaches the prescribed amount or passing 20 the prescribed first time from start of communication, in more than a specified number, for example, one or more of buffers out of one or two or more buffers corresponding to a same virtual path. Therefore, in a simple method, the reading-start timing in every one or two or more buffers 25 corresponding to each virtual path can be controlled.

2

According to still another aspect of this invention, the cell disassembly unit starts reading action from all buffers corresponding to the virtual path when the data accumulated amount reaches the prescribed amount or passing  
5 the prescribed first time from start of communication, in all buffers out of one or two or more buffers corresponding to a same virtual path, and therefore, in a simple method, the reading-start timing in every one or two or more buffers corresponding to each virtual path can be controlled.

10 According to still another aspect of this invention, the cell disassembly unit once stops, when an underflow occurs in the buffer, reading out from the buffer having the underflow, and resumes reading out when the data accumulated amount reaches again the prescribed amount or  
15 passing a second prescribed time after occurrence of underflow, and therefore if an underflow occurs, a normal communication can be recovered promptly, thereby realizing adequate communication.

According to still another aspect of this invention,  
20 the cell disassembly unit, when an underflow occurs in any one of one or two or more buffers corresponding to a same virtual path, resets all buffers corresponding to this virtual path, and once stops writing and reading in these buffers, and resumes writing so that the data belonging to  
25 a same frame period may be accumulated uniformly at the

09057494.060601



beginning of these buffers, and resumes reading out when the data accumulated amount in these buffers reaches again the prescribed amount or passing a second prescribed time after execution of resetting, and therefore if an underflow occurs, a normal communication can be recovered promptly, thereby realizing adequate communication.

According to still another aspect of this invention, the cell disassembly unit resets, when an overflow occurs in the buffer, the buffer having the overflow, once stops reading out from this buffer, and resumes reading out when the data accumulated amount reaches again the prescribed amount or passing a second prescribed time after execution of resetting, and therefore if an overflow occurs, a normal communication can be recovered promptly, thereby realizing adequate communication.

According to still another aspect of this invention, the cell disassembly unit, when an overflow occurs in any one of one or two or more buffers corresponding to a same virtual path, resets all buffers corresponding to this virtual path, and once stops writing and reading in these buffers, and resumes writing so that the data belonging to a same frame period may be accumulated uniformly at the beginning of these buffers, and resumes reading out when the data accumulated amount in these buffers reaches again the prescribed amount or passing a second prescribed time

09857494.060601

after execution of resetting, and therefore if an overflow occurs, a normal communication can be recovered promptly, thereby realizing adequate communication.

According to still another aspect of this invention,  
5 the cell disassembly unit once stops, when an overflow occurs in the buffer, writing into the buffer having the overflow, and resumes writing when the data accumulated amount in this buffer decreases to the prescribed amount or passing a second prescribed time after occurrence of overflow, and therefore  
10 if an overflow occurs, a normal communication can be recovered promptly, thereby realizing adequate communication.

According to still another aspect of this invention,  
the cell disassembly unit once stops, when an overflow occurs  
15 in the buffer, writing into the buffer having the overflow, and resumes writing when the data accumulated amount in this buffer decreases to the prescribed amount or passing a second prescribed time after occurrence of overflow, and therefore  
if an overflow occurs, a normal communication can be  
20 recovered promptly, and therefore if an overflow occurs, a normal communication can be recovered promptly, thereby realizing adequate communication.

According to still another aspect of this invention,  
the increasing or extending unit increases the prescribed  
25 amount or extends the second prescribed time when an

09857494-060601

underflow occurs in the buffer. Therefore, recurrence of underflow can be automatically decreased, thereby realizing adequate communication.

According to still another aspect of this invention,  
5 the increasing or extending unit increases the prescribed amount or extends the second prescribed time when an overflow occurs in the buffer. Therefore, recurrence of overflow can be automatically decreased, thereby realizing adequate communication.

10 According to still another aspect of this invention, the storing step stores the data distributed in each time slot temporarily in the buffer provided in each time slot, and absorbs fluctuations of the cell. Therefore, fluctuations can be absorbed in each time slot constant in  
15 communication speed, and the capacity of each buffer is always enough at the minimum capacity (the capacity enough to accommodate communication speed in each time slot) regardless of the communication speed of virtual path, and the memory is composed in a simple structure, thereby  
20 suppressing both increase of total capacity of memory for absorbing fluctuations and complication of memory circuit, and reducing the cost.

According to still another aspect of this invention, the accumulating step accumulates data after start of  
25 communication by writing data distributed in each time slot

00057494-000601



the setting step sets the value of the prescribed amount or first prescribed time on the basis of the result of measurement at the measuring step. Therefore, the prescribed amount or first prescribed time can be adjusted  
5 automatically and appropriately, thereby realizing a more adequate communication.

According to still another aspect of this invention, the prescribed amount or first prescribed time is present independently in each buffer, and the reading and writing  
10 step determines the reading-start timing from the buffer independently in each buffer, and therefore the reading-start timing can be controlled finely in each buffer.

According to still another aspect of this invention, the prescribed amount or first prescribed time is present  
15 independently in each virtual path, and the reading and writing step determines the reading-start timing from the buffer independently in every one or two or more buffers corresponding to each virtual path, and therefore it is higher in probability that the data to be issued in a same  
20 frame is actually issued in the same frame.

According to still another aspect of this invention, the reading and writing step starts reading action from all buffers corresponding to the virtual path when the data accumulated amount reaches the prescribed amount or passing  
25 the prescribed first time from start of communication, in

100000464590

more than a specified number, for example, one or more of buffers out of one or two or more buffers corresponding to a same virtual path. Therefore, in a simple method, the reading-start timing in every one or two or more buffers  
5 corresponding to each virtual path can be controlled.

According to still another aspect of this invention, the reading and writing step starts reading action from all buffers corresponding to the virtual path when the data accumulated amount reaches the prescribed amount or passing  
10 the prescribed first time from start of communication, in all buffers out of one or two or more buffers corresponding to a same virtual path, and therefore, in a simple method, the reading-start timing in every one or two or more buffers corresponding to each virtual path can be controlled.

15 According to still another aspect of this invention, the reading and writing step once stops, when an underflow occurs in the buffer, reading out from the buffer having the underflow, and resumes reading out when the data accumulated amount reaches again the prescribed amount or  
20 passing a second prescribed time after occurrence of underflow, and therefore if an underflow occurs, a normal communication can be recovered promptly, thereby realizing adequate communication.

According to still another aspect of this invention,  
25 the reading and writing step, when an underflow occurs in

00057494-060601







an overflow occurs, a normal communication can be recovered promptly, thereby realizing adequate communication.

According to still another aspect of this invention, the increasing or extending step increases the prescribed amount or extends the second prescribed time when an  
5 underflow occurs in the buffer, and therefore, recurrence of underflow can be automatically decreased, thereby realizing adequate communication.

According to still another aspect of this invention,  
10 the increasing or extending step increases the prescribed amount or extends the second prescribed time when an overflow occurs in the buffer, and therefore, occurrence of underflow can be automatically decreased, thereby realizing adequate communication.

15 According to still another aspect of this invention, a same prescribed time can be defined for the first prescribed time and second prescribed time. Therefore, in the event of overflow or underflow, when the second prescribed time is extended, the first prescribed time is also extended,  
20 thereby decreasing occurrence of under flow after start of communication.

According to still another aspect of this invention, since the method of the invention can be executed by the computer, both increase of total capacity of the memory for  
25 absorbing fluctuations and complication of memory control

09057494 "060601"

circuit can be suppressed, so that the cost can be reduced.

#### INDUSTRIAL APPLICABILITY

As described herein, the cell disassembly device, cell  
5 disassembly method, and computer-readable recording medium  
recording a program for executing this method by a computer  
are suited to transmission and reception of effective data  
(effective time slot) on the STM circuit having plural time  
slots (TS) divided and multiplexed in time in the frame period  
10 through ATM network, by using structured data transfer (SDT)  
method or the like designated in the ITU-T Recommendation,  
and are further useful for suppressing both increase of total  
capacity of memory for absorbing fluctuations and  
complication of memory control circuit, and reducing the  
15 cost.

05057494.060601



4. The cell disassembly device according to claim 3, further comprising a measuring unit which measures fluctuations of the cell, wherein said setting unit sets the value of the prescribed amount or first prescribed time on the basis of the result of measurement by said measuring unit.

5. The cell disassembly device according to claim 2, wherein the prescribed amount or first prescribed time is present independently in each buffer, and said cell disassembly unit determines the reading-start timing from said buffer independently in each buffer.

6. The cell disassembly device according to claim 2, wherein the prescribed amount or first prescribed time is present independently in each virtual path, and said cell disassembly unit determines the reading-start timing from said buffer independently in every one or two or more buffers corresponding to each virtual path.

7. The cell disassembly device according to claim 6, wherein said cell disassembly unit starts reading action from all buffers corresponding to the virtual path when the data accumulated amount reaches the prescribed amount or passing the prescribed first time from start of communication,

in more than a specified number of buffers out of one or two or more buffers corresponding to a same virtual path.

8. The cell disassembly device according to claim 6,  
5 wherein said cell disassembly unit starts reading action from all buffers corresponding to the virtual path when the data accumulated amount reaches the prescribed amount or passing the prescribed first time from start of communication, in all buffers out of one or two or more buffers corresponding  
10 to a same virtual path.

9. The cell disassembly device according to claim 2, wherein said cell disassembly unit once stops, when an underflow occurs in the buffer, reading out from the buffer  
15 having the underflow, and resumes reading out when the data accumulated amount reaches again the prescribed amount or passing a second prescribed time after occurrence of underflow.

20 10. The cell disassembly device according to claim 1, wherein said cell disassembly unit accumulates data after start of communication by writing data distributed in each time slot into said buffer, reads out the data from said buffer, parallel to writing, after passing a first prescribed  
25 time, and sends out the read data to the STM circuit interface.

00057494, 060601



15. The cell disassembly device according to claim 14, wherein said cell disassembly unit starts reading action from all buffers corresponding to the virtual path when the data accumulated amount reaches the prescribed amount or  
5 passing the prescribed first time from start of communication, in more than a specified number of buffers out of one or two or more buffers corresponding to a same virtual path.

16. The cell disassembly device according to claim 14, wherein said cell disassembly unit starts reading action from all buffers corresponding to the virtual path when the data accumulated amount reaches the prescribed amount or  
10 passing the prescribed first time from start of communication, in all buffers out of one or two or more buffers corresponding  
15 to a same virtual path.

17. The cell disassembly device according to claim 10, wherein said cell disassembly unit once stops, when an underflow occurs in the buffer, reading out from the buffer  
20 having the underflow, and resumes reading out when the data accumulated amount reaches again the prescribed amount or passing a second prescribed time after occurrence of underflow.

18. A cell disassembly method for disassembling a cell received from an ATM circuit interface, extracts data from payload, distributes data in plural time slots divided and multiplexed in time in frame period according to a sender, and sends out to an STM circuit interface, the method comprising the step of:

storing the data distributed in each time slot temporarily in a buffer provided in each time slot, and absorbing fluctuations of the cell.

10

19. A computer-readable recording medium recording a computer program for causing a computer to execute a cell disassembly method for disassembling a cell received from an ATM circuit interface, extracts data from payload, distributes data in plural time slots divided and multiplexed in time in frame period according to a sender, and sends out to an STM circuit interface, the method comprising the step of storing the data distributed in each time slot temporarily in a buffer provided in each time slot, and absorbing fluctuations of the cell.



## ABSTRACT

In a cell assembly and disassembly device having a cell disassembly unit (2) for disassembling the cell received from an ATM circuit interface, extracting data from the payload, distributing the data in plural time slots divided and multiplexed in time in frame period, and sending out to an STM circuit interface, the cell disassembly unit (2) comprises a fluctuation absorption buffer unit (11) provided in each time slot, and the data distributed in each time slot is once held in these buffers to absorb cell fluctuations, thereby suppressing both increase of total capacity of the memory for absorbing fluctuations and complication of memory control circuit, and reducing the cost.

09857494-066601

FIG. 1

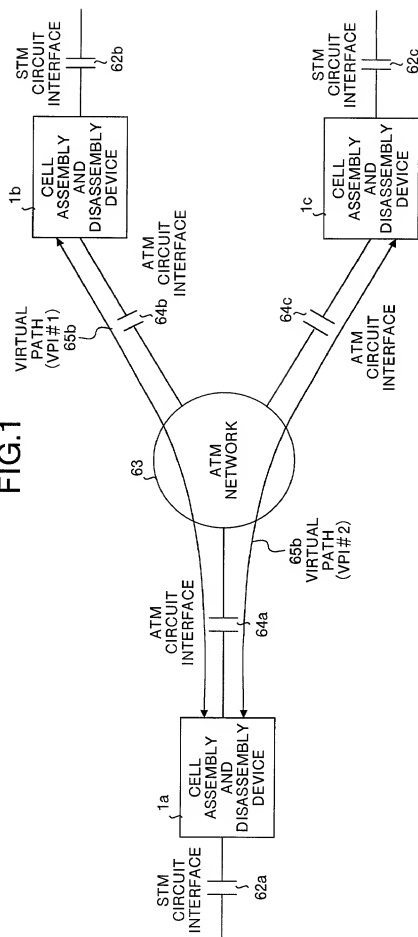


FIG.2

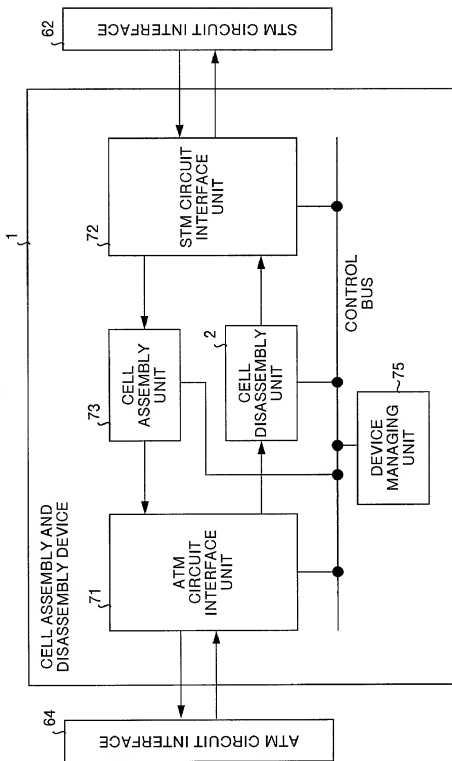


FIG.3

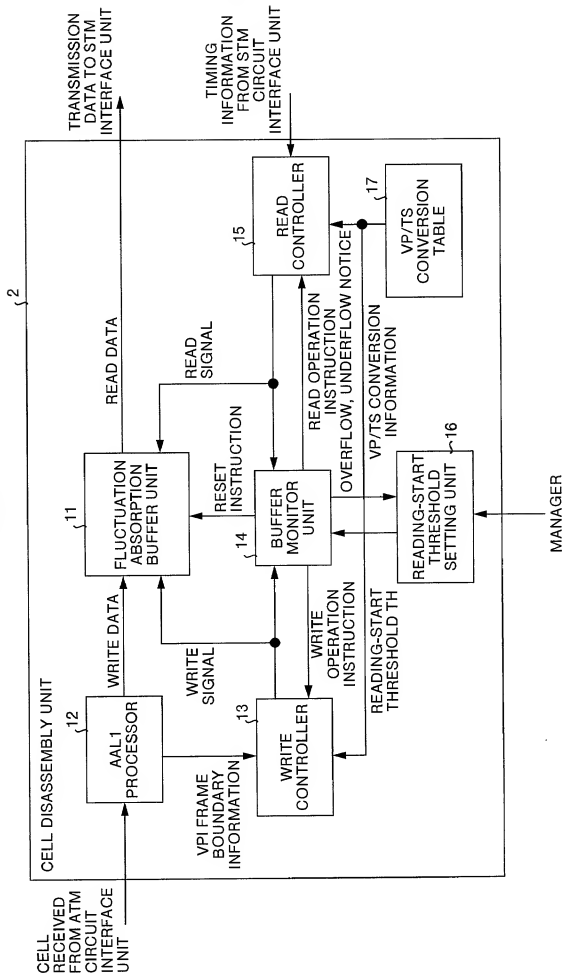
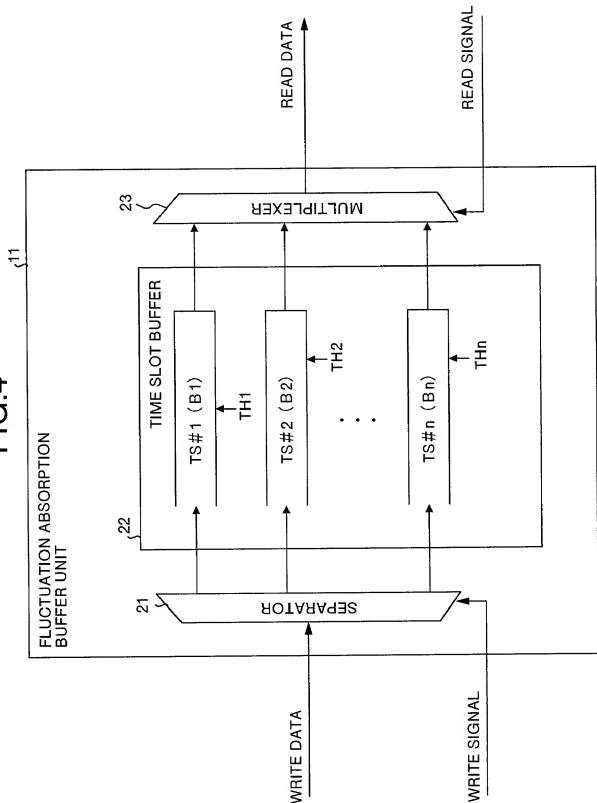


FIG.4



5/29

FIG.5

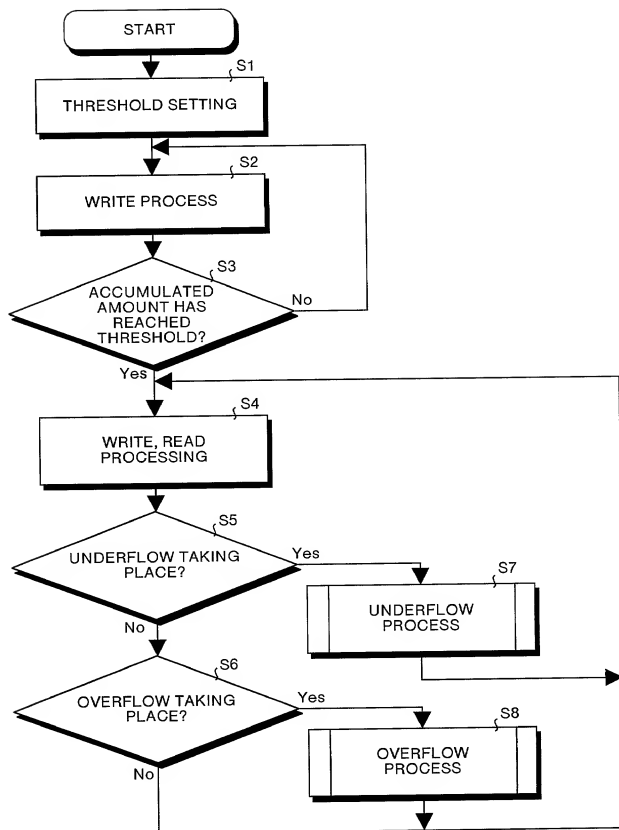


FIG.6

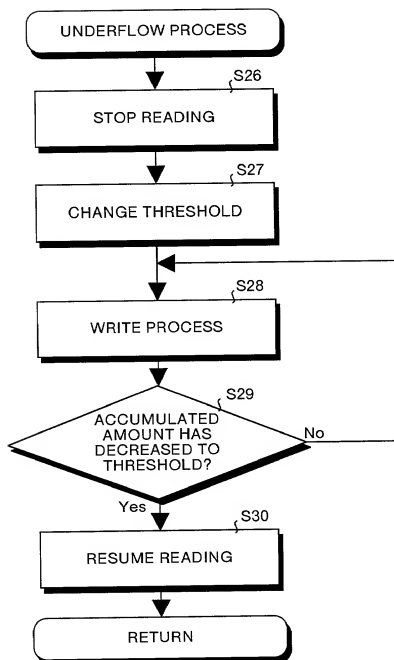


FIG.7

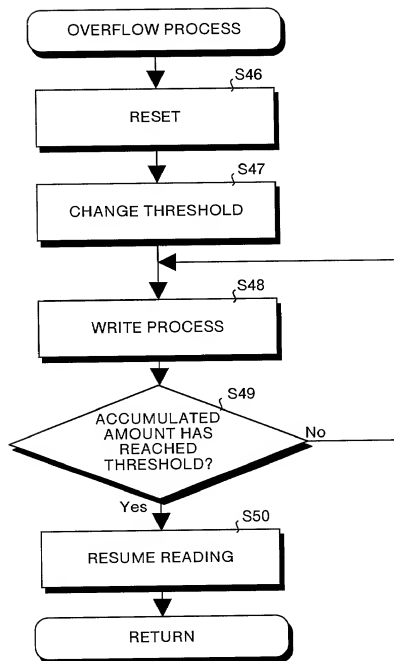




FIG.8

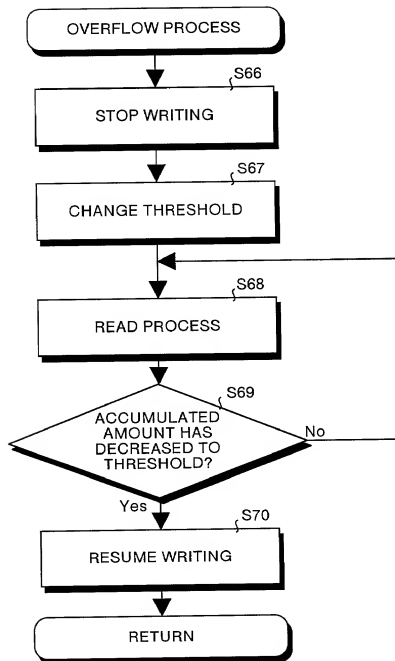


FIG.9

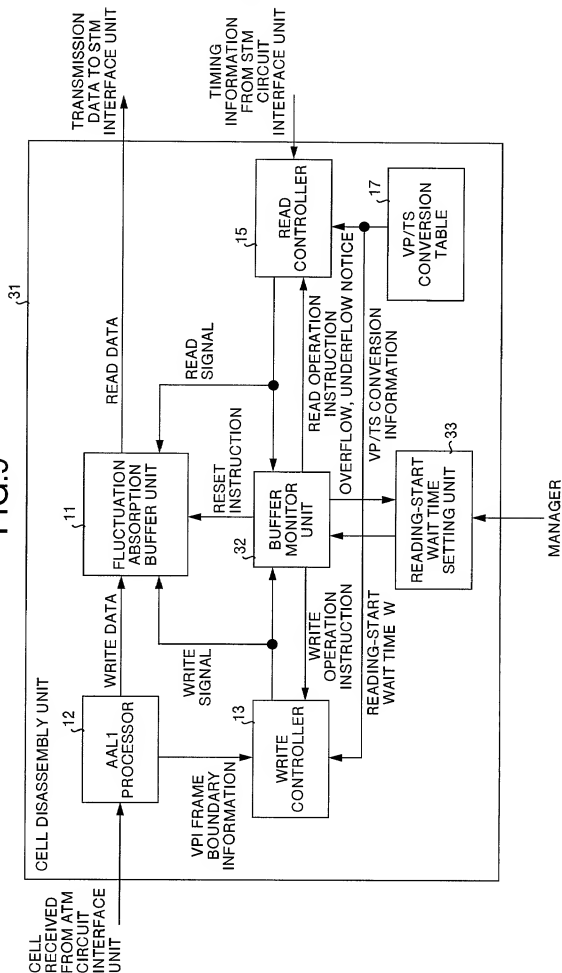


FIG.10

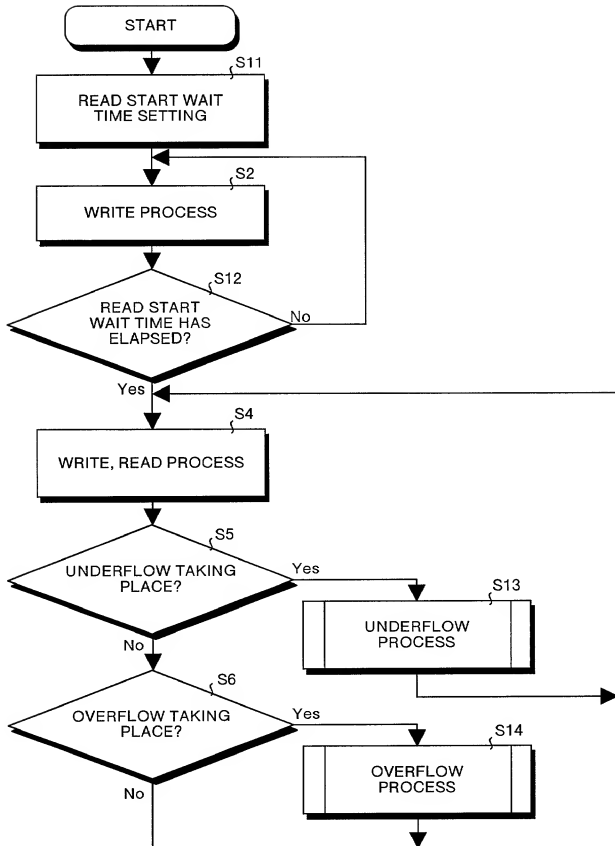
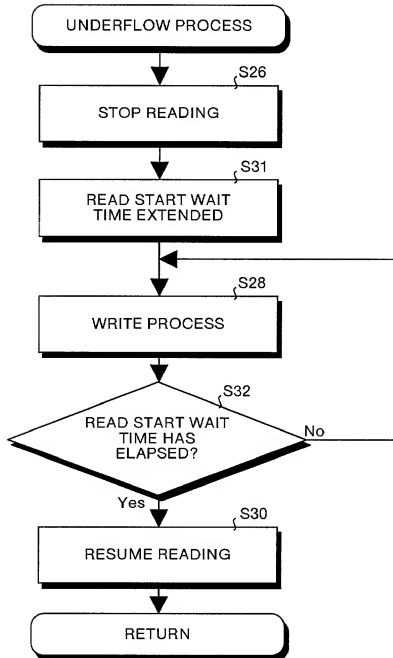


FIG.11



12/29

FIG.12

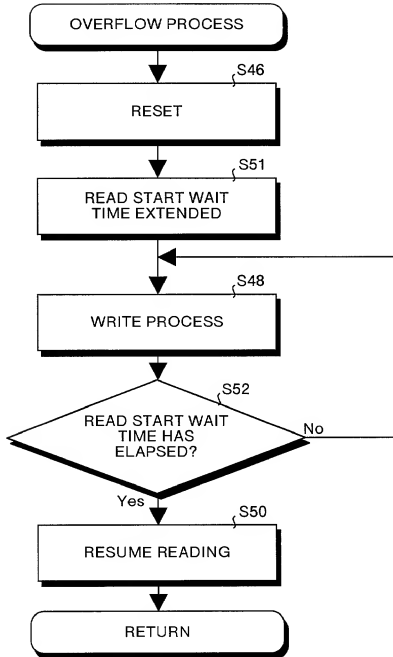


FIG.13

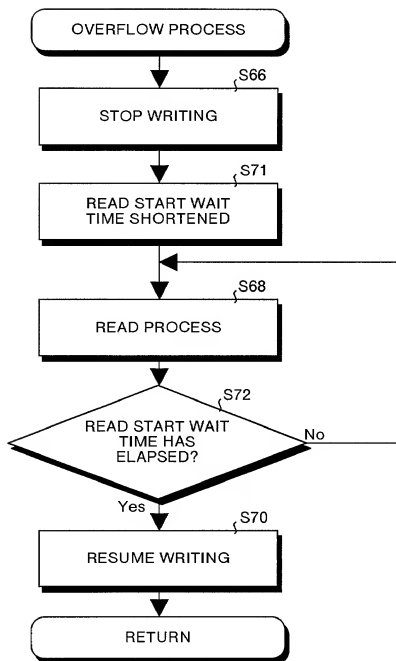


FIG.14

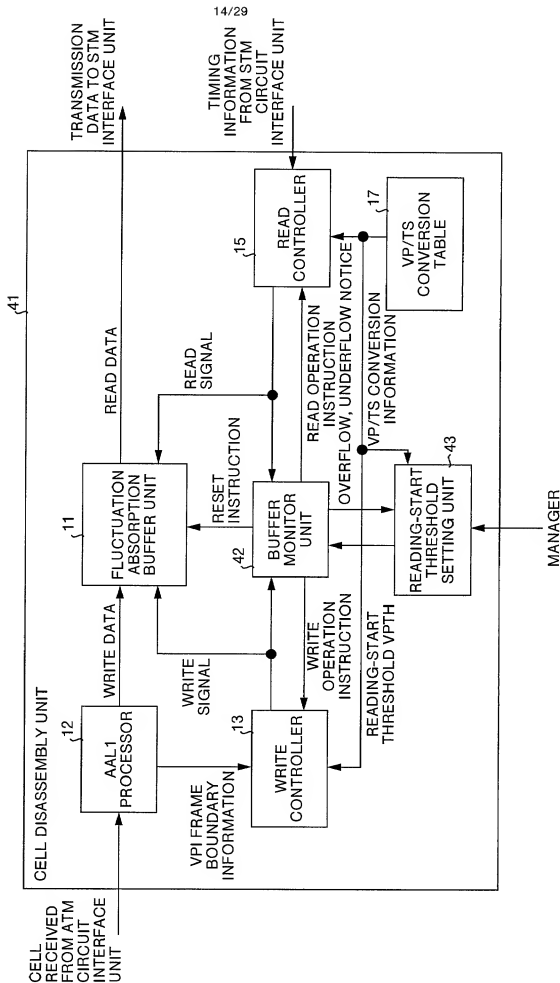


FIG.15


READ START THRESHOLD VP<sub>TH1</sub>

FIG.16


READ START THRESHOLD VP<sub>TH1</sub>



FIG.17

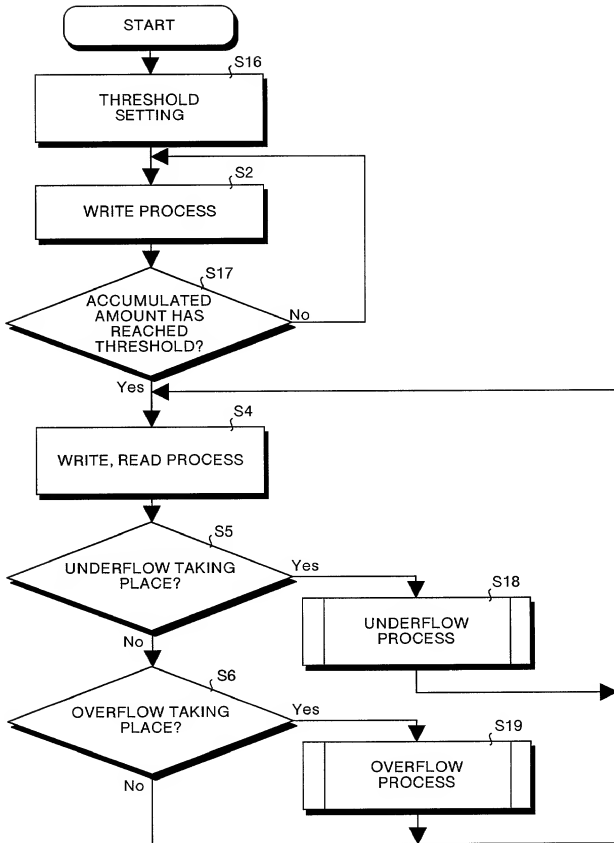


FIG.18

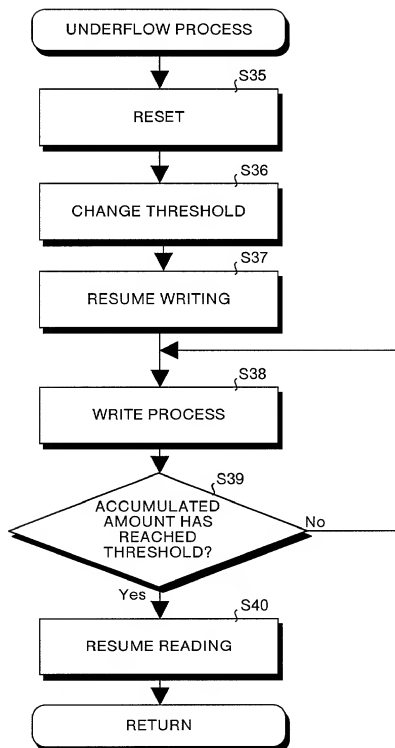


FIG.19

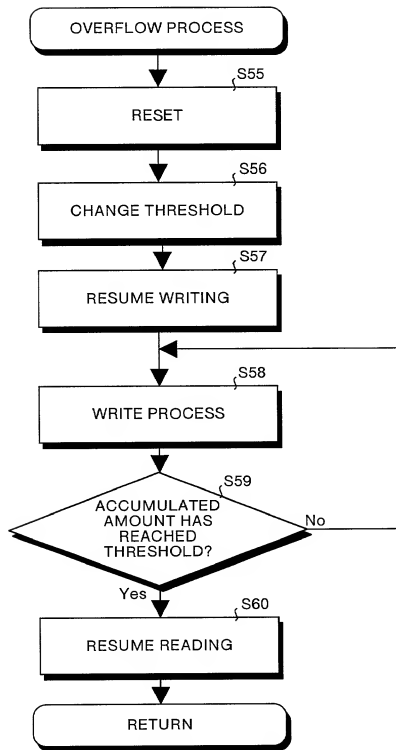


FIG.20

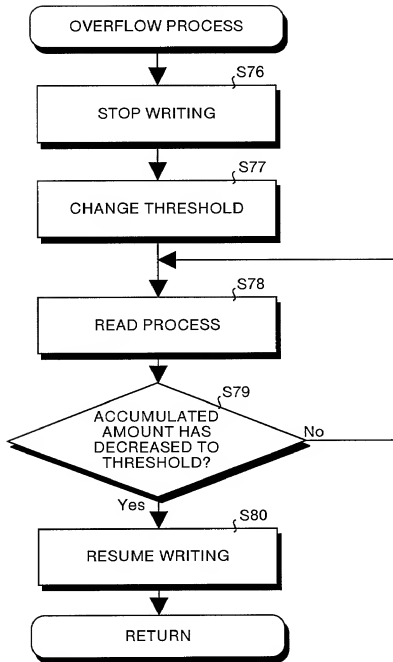


FIG.21

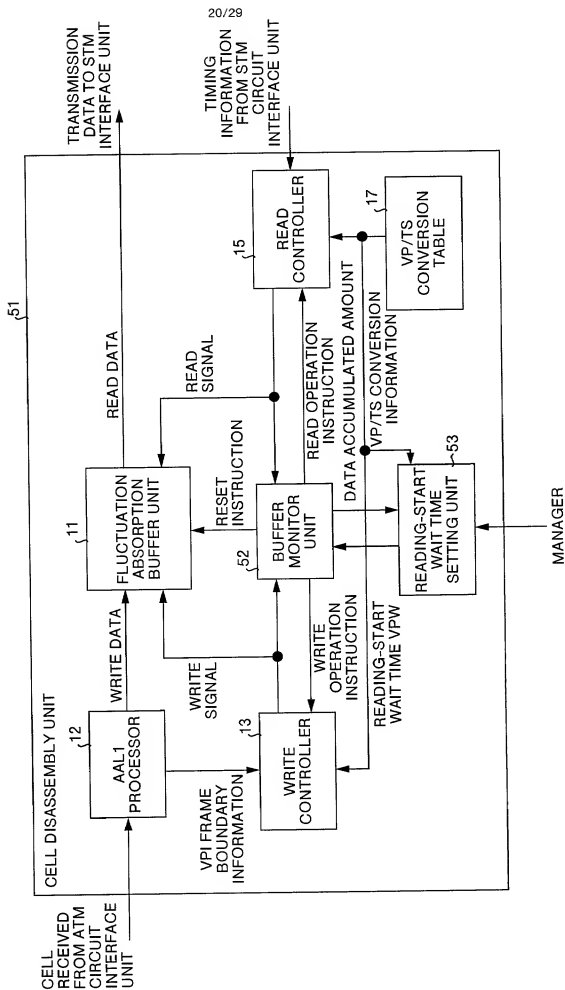


FIG.22

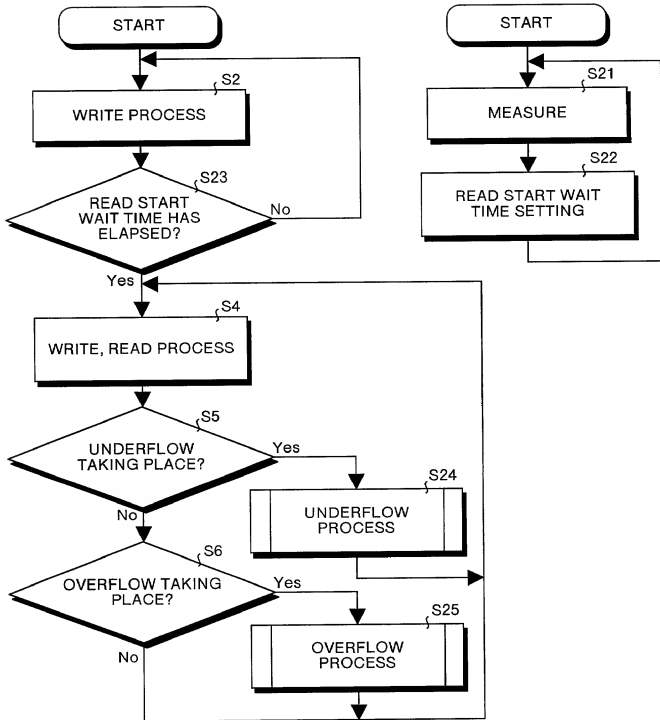


FIG.23

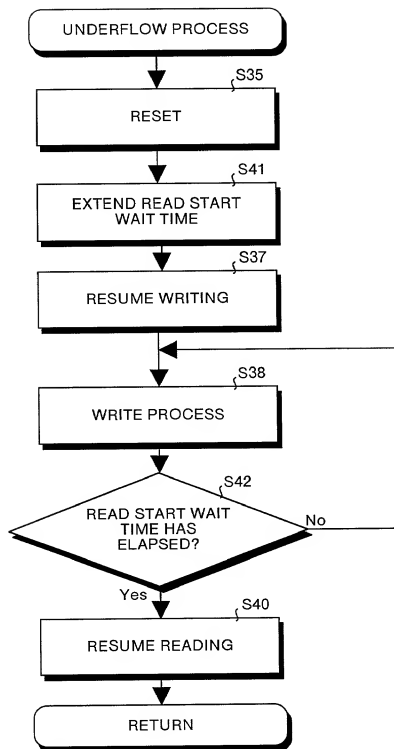


FIG.24

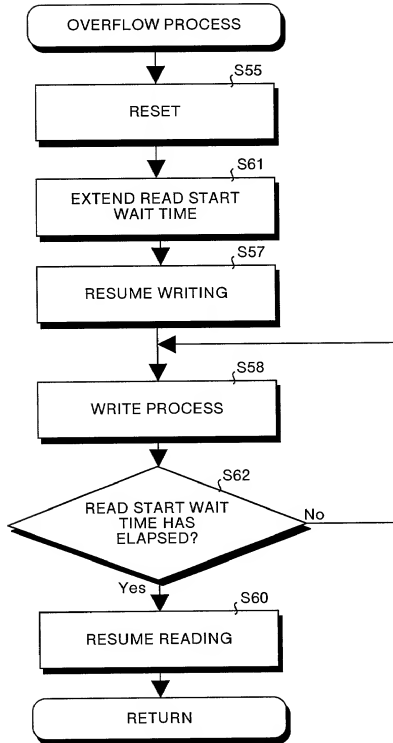




FIG.25

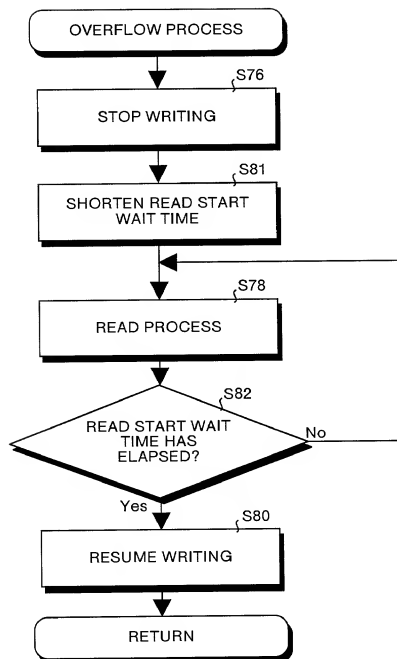


FIG.26

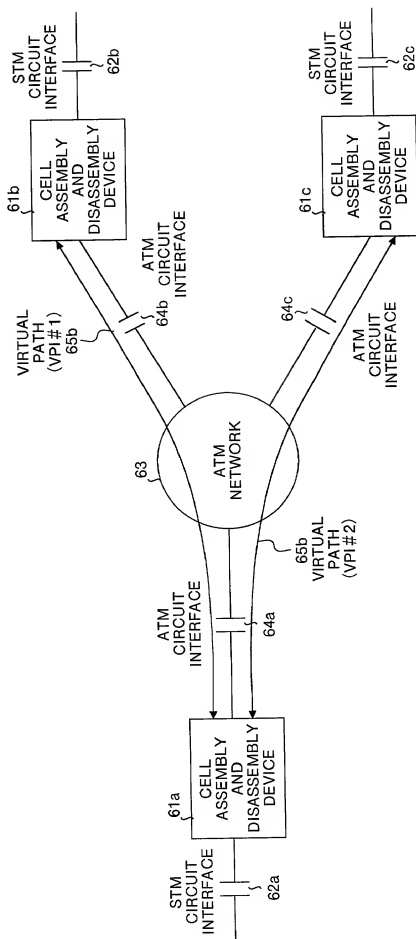


FIG.27

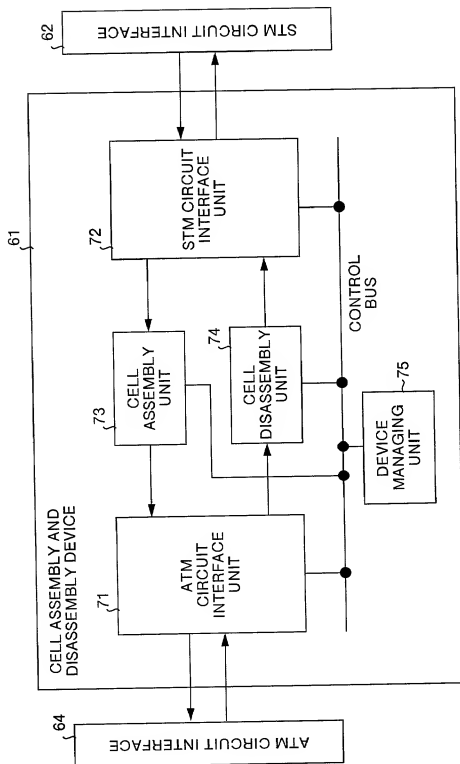


FIG.28

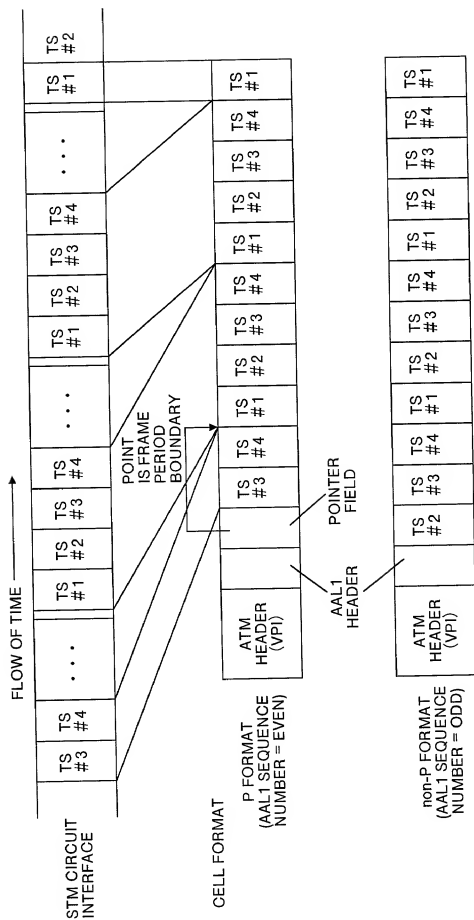


FIG.29

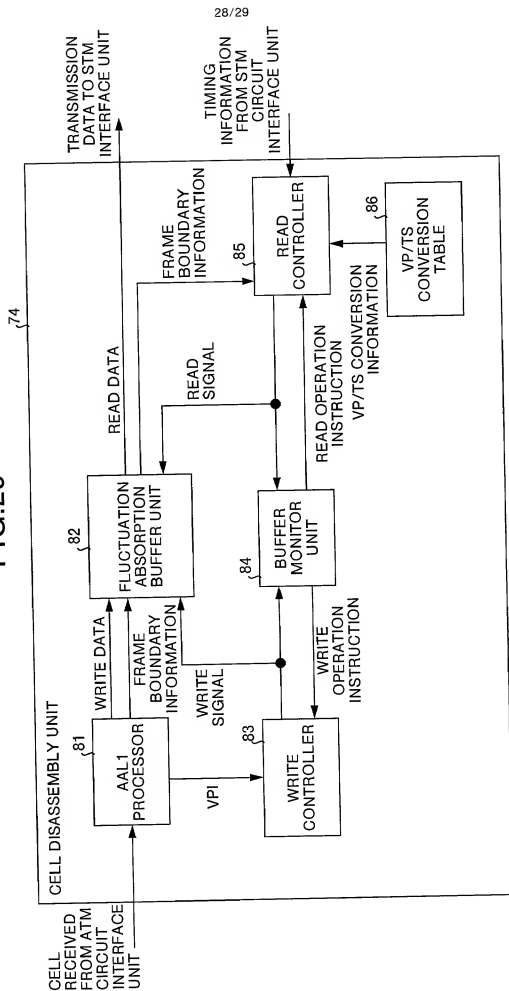
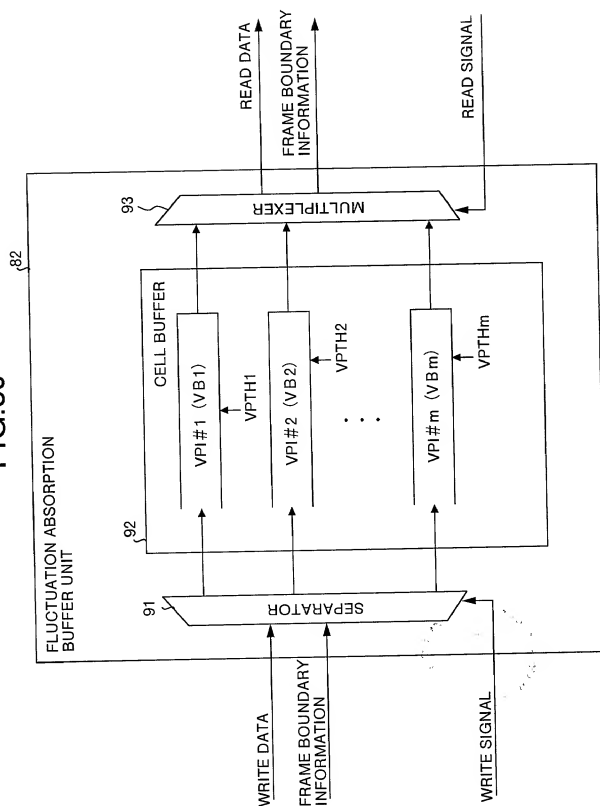


FIG.30



## Declaration and Power of Attorney For Patent Application

## 特許出願宣言書

## Japanese Language Declaration

私は、下欄に氏名を記載した発明者として、以下のとおり宣言する：

私の住所、郵便の宛先および国籍は、下欄に氏名に続いて記載したとおりであり、

名称の発明に関し、請求の範囲に記載した特許を求める主題の本来の、最初にして唯一の発明者である（一人の氏名のみが下欄に記載されている場合）か、もしくは本来の、最初にして共同の発明者である（複数の氏名が下欄に記載されている場合）と信じ、

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD OF AND DEVICE FOR CELL

DISASSEMBLY, AND COMPUTER PRODUCT

その明細書を  
(該当する方に印を付す)

☐ ここに添付する。

☐ \_\_\_\_\_ 日に出願番号

第 \_\_\_\_\_ 号として提出し、

\_\_\_\_\_ 日に補正した。

(該当する場合)

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as

Application Serial No. \_\_\_\_\_

and was amended on \_\_\_\_\_

(if applicable)

私は、前記のとおり補正した請求の範囲を含む前記明細書の内容を検討し、理解したことを陳述する。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37部第1章第56条 項に従い、本願の審査に所要の情報を開示すべき義務を有することを認める。

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

# Japanese Language Declaration

2611-0149P

私は、合衆国法典第35部第119 条にもとづく下記の外国特許出願または発明者証出願の外国優先権利益を主張し、さらに優先権の主張に係わる基礎出願の出願日前の出願日を有する外国特許出願または発明者証出願を以下に明記する:

Prior foreign applications

先の外国出願

Priority claimed

優先権の主張

11-287381	Japan	7/Oct./1999
(Number)	(Country)	(Day/Month/Year Filed)
(番号)	(国名)	(出願の年月日)
_____	_____	_____
(Number)	(Country)	(Day/Month/Year Filed)
(番号)	(国名)	(出願の年月日)
_____	_____	_____
(Number)	(Country)	(Day/Month/Year Filed)
(番号)	(国名)	(出願の年月日)
_____	_____	_____

<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
あり	なし
<input type="checkbox"/> Yes	<input type="checkbox"/> No
あり	なし
<input type="checkbox"/> Yes	<input type="checkbox"/> No
あり	なし

私は、合衆国法典第35部第120 条にもとづく下記の合衆国特許出願の利益を主張し、本願の請求の範囲各項に記載の主題が合衆国法典第35部第112 条第1 項に規定の態様で先の合衆国出願に開示されていない限度において、先の出願の出願日と本願の国内出願日またはPCT 国際出願日の間に公表された連邦規則法典第37部第1 章第56条 項に記載の所要の情報を開示すべき義務を有することを認める:

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)
(出願番号)	(出願日)
_____	_____

(現況)	(Status)
(特許済み、係属中、放棄済み)	(patented, pending, abandoned)
_____	_____

(Application Serial No.)	(Filing Date)
(出願番号)	(出願日)
_____	_____

(現況)	(Status)
(特許済み、係属中、放棄済み)	(patented, pending, abandoned)
_____	_____

私は、ここに自己の知識にもとづいて行った陳述がすべて真実であり、自己の有する情報および信ずるところに従って行った陳述が真実であると信じ、さらに故意に虚偽の陳述等を行った場合、合衆国法典第18部第1001条により、罰金もしくは禁錮に処せられるか、またはこれらの刑が併科され、またかかる故意による虚偽の陳述が本願ないし本願に対して付与される特許の有効性を損うことがあることを認識して、以上の陳述を行ったことを宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.



# Japanese Language Declaration

2611-0149P

委任状：私は、下記発明者として、以下の代理人をここに退任し、本願の手続を遂行すること並びにこれに関する一切の行為を特許商標庁に対して行うことを委任する。  
(代理人氏名および登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Terrell C. Birch (Reg. No. 19,382)  
Joseph A. Kolasch (Reg. No. 22,463)  
Bernard L. Sweeney (Reg. No. 24,448)  
Charles Gorenstein (Reg. No. 29,271)  
Leonard R. Svensson (Reg. No. 30,330)  
Andrew D. Meikle (Reg. No. 32,858)  
Joe McKinney Muncy (Reg. No. 32,334)  
C. Joseph Faraci (Reg. No. 32,350)

Raymond C. Stewart (Reg. No. 21,066)  
James M. Slattery (Reg. No. 28,380)  
Michael K. Mutter (Reg. No. 29,680)  
Gerald M. Murphy, Jr. (Reg. No. 28,977)  
Terry L. Clark (Reg. No. 32,644)  
Marc S. Weiner (Reg. No. 32,181)  
Donald J. Daley (Reg. No. 34,313)

書類の送付先：

Send Correspondence to:

**BIRCH, STEWART, KOLASCH & BIRCH, LLP**

P.O. Box 747 • Falls Church, Virginia 22040-0747

Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

直通電話連絡先：(名称および電話番号)

Direct Telephone Calls to: (name and telephone number)

唯一のまたは第一の発明者の氏名

100

Full name of sole or first inventor  
Hirotooshi YAMADA

同発明者の署名

日付

Inventor's signature

Date

山田 浩利

May 25, 2001

住所

Residence

Tokyo, Japan

国籍

Citizenship

Japanese

郵便の宛先

Post Office Address

c/o Mitsubishi Denki Kabushiki Kaisha

2-3, Marunouchi 2-chome, Chiyoda-ku  
TOKYO 100-8310 JAPAN

第2の共同発明者の氏名 (該当する場合)

200

Full name of second joint inventor, if any  
Kentaro TANAKA

同第2発明者の署名

日付

Second inventor's signature

Date

田中 健太郎

May 25, 2001

住所

Residence

Tokyo, Japan

国籍

Citizenship

Japanese

郵便の宛先

Post Office Address

c/o Mitsubishi Denki Kabushiki Kaisha

2-3, Marunouchi 2-chome, Chiyoda-ku  
TOKYO 100-8310 JAPAN

(第六またはそれ以降の共同発明者に対しても同様な情報および署名を提供すること。)

(Supply similar information and signature for third and subsequent joint inventors.)